



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101217

LDC
-
DIST
-

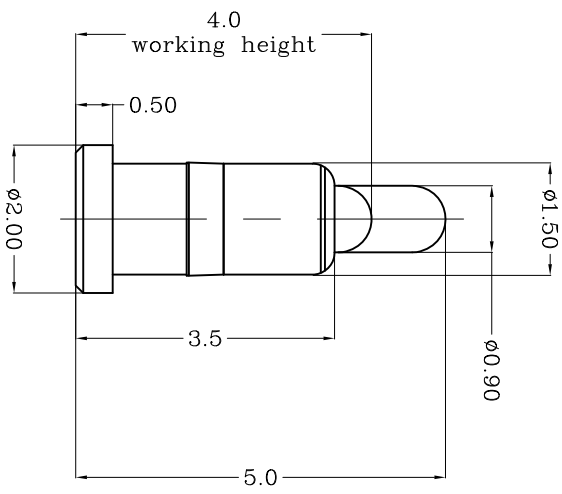

TOP-LINK

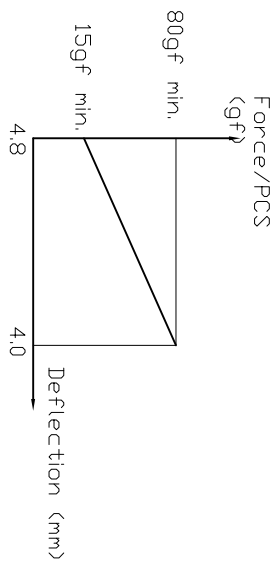

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).
 - 2)Spring : Stainless steel wire
- Plating
- 1)Body: 0.1um Gold plating over min. 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickle plating
- Mechanical
- 1)Total stroke : 1.4mm
 - 2)Durability: 10,000 cycle min.
- Electrical
- 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

new			08/03/28
REVISION	APVD	DATE	
RECORD			
LTR			

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	—
DWN		APVD	Lansing
CHK		REL	
Andy			
NAME			
PGGD PIN			
PG-2.0-0.5-1.5-3.5-5.0			
SCALE	1:1	A4	DWG NO. C-101217
		SHEET 1 OF 1	REV A

PART NUMBER	
101217-1	
FIN —	
Top-Link Electronics Ltd.	

USED ON
—