
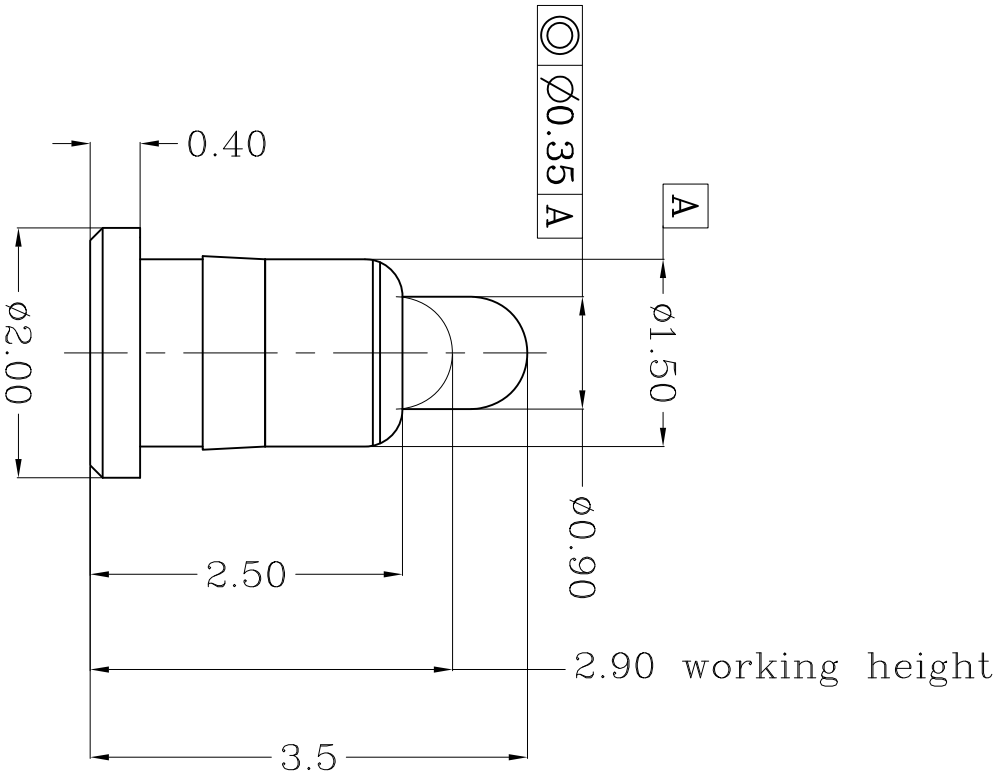




TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance:30mOhm Max.Current rating: 2.0A
- 4 Packaging Spec.Comformance to EIA 481
- 5 RoHS compliant.

Table 1 Mechanical performance

Working height	2.90mm	80±25gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4	CAP	1	High temp,Plastic UL94 V-0 Color Black	_____
5				

Top-Link Electronics Ltd TOLERANCES UNLESS OTHER SPECIFIED 0.0 = ± 0.15 0.00 = ± 0.10 0.000 = ± Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.D0 NOT SCALE PRINT.	Type	Customer drawing	Unit	mm	Weight	
	DWN:	Qin	APVD:		Top-Link Electronics Top-Link Electronics Ltd.	
	CHK:		REL:			
	Name					
	Customer drawing					
	Scale	Size	DWG No.		Page	Rev.
	1:1	A4		C-101607	1/1	2