



DWG NO.
C-101282

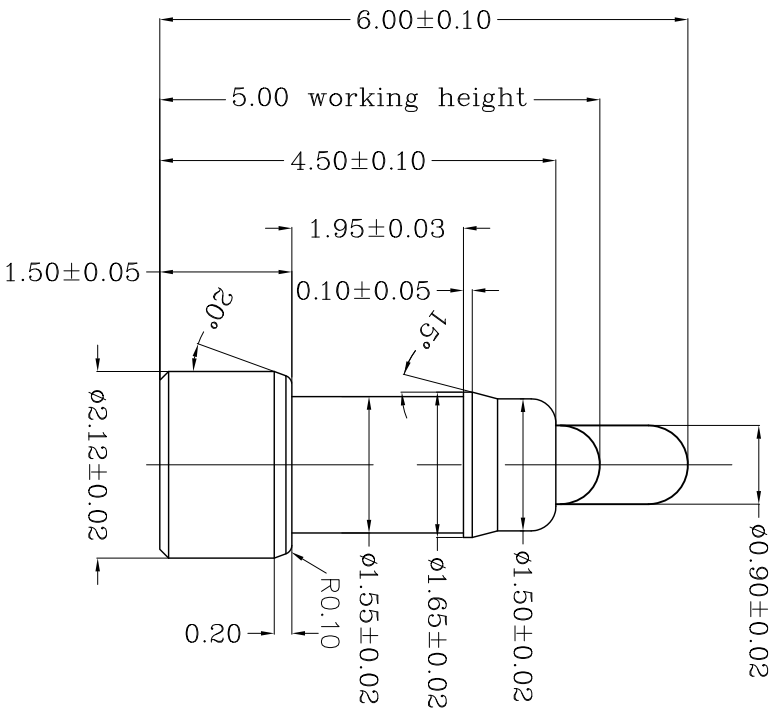

1) Body : CuZn36 Pb3 (C36000)
 2) Plunger: CuZn36,PB3(C36000) or CuZn30 or CuZn35
 3) Spring : Stainless steel wire
 Plating
 Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
 Mechanical
 1) Total stroke : 1.4mm
 2) Durability: Min 1000 Cycle
 Electrical
 Contact resistance: 20 mOhm max at working height after 5 cycles

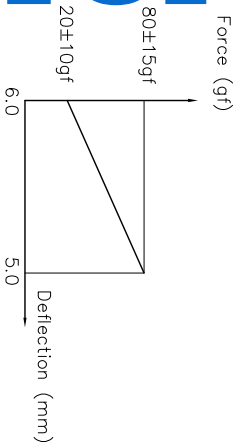

TOP-LINK

101282-
PART NUMBER

USED ON