



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101078

LDC
-
DIST
-

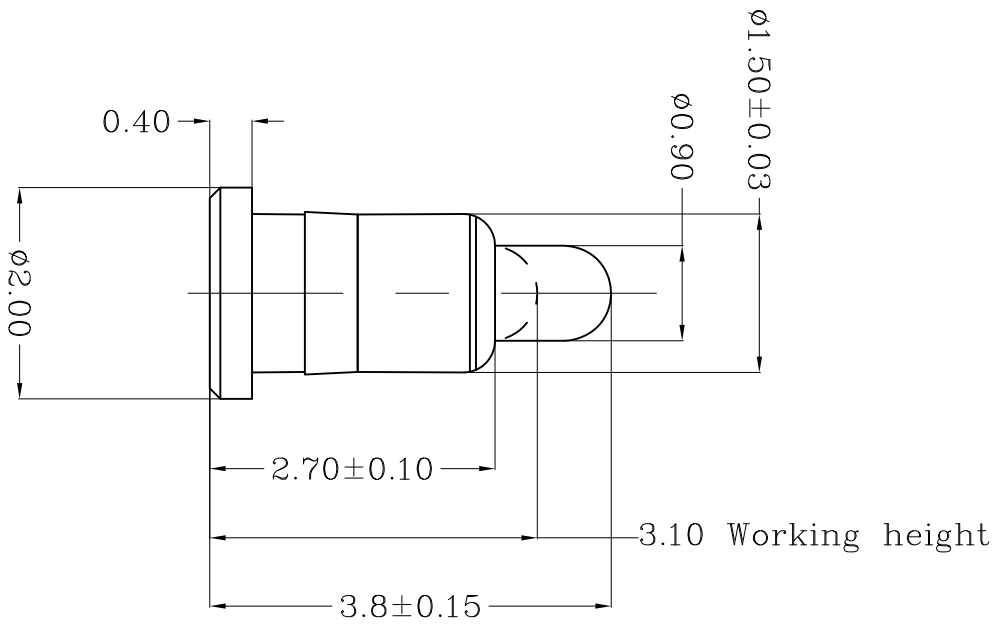

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (镀金0.1um 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (镀金0.4um 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1) Force: $80 \pm 30gf$ per pin at 0.7mm stroke (力: $80 \pm 30gf$ 的力: 0.7mm 行程)
 - 2) Total stroke(总行程) : 0.90mm
 - 3) Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能):
 - 1) Contact resistance(接触阻抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

TOP-LINK

	Add dimension
LTR	REVISION RECORD
APVD	DATE

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ± 0.05		
0.00	= ± 0.03		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	△ 1	HT TR	FIN
DWN		APVD	— √
QIN		Lansing	
CHK		REL	
Jin			
NAME	PGGD PIN		
SCALE	1:1	A4	DWG NO.
			C-101078
			PG-2.0-0.4-1.5-2.7-3.8
			Top-Link Electronics Ltd.

101078-1
PART NUMBER

USED ON