


DWG NO.
C-101277

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

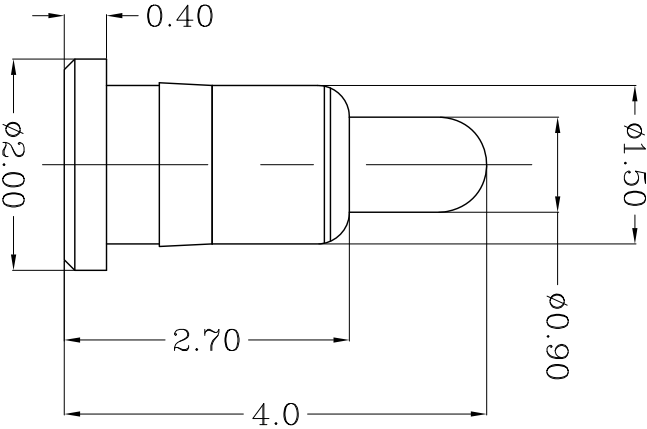

Notes:
△ Material(材质):

1)Body : Brass

2)Plunge : Brass

3)Spring : Stainless steel wire

2 Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force: Min 85gf per pin at 0.80mm stroke (力: 下压0.80mm 力: 85±20gf)

2)Total stroke(总行程) : 1.00mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能):

1)Contact resistance(接触阻抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 3.0A

USED ON

101277-1

PART NUMBER

更新	2013/01/11	DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	△	HT TR	—	FIN	—	▽
更新	2011/03/07	0.0	= ±0.15	DWN	Qin	APVD				Top-Link Electronics Ltd.
NEW	2008/10/13	0.00	= ±0.10	CHK		REL				
		0.000	= ±	NAME	POGO PIN PG-2.0-0.4-1.5-2.7-4.0					
		ANGLE: ±1°		SURF TEXTURE: 32/	SCALE	A4	DWG NO.	C-101277	SHEET 1 OF 1	REV A2
		REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		DO NOT SCALE PRINT	1:1					
LTR	REVISION RECORD	APVD	DATE							

4

3

2

1