



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101386

LDC	-
DIST	-

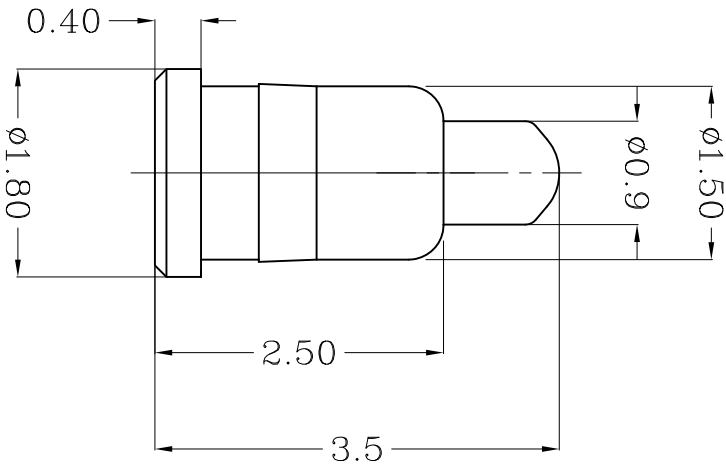

TOP-LINK

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, (C36000) or CuZn39 Pb3 or CuZn38 Pb2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 0.7mm
- 2)Spring force:20 gf at 3.1mm
- 3)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

NEW		2009/09/29
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
NAME		POGO PIN Customer Drawing	
SCALE	1:1	DWG	PG-1.8-0.4-1.5-2.5-3.5
A4		NO.	C-101386
MATERIAL		HT TR	FIN
DWN	QIN	APVD	REL
CHK			
Top-Link Electronics		Top-Link Electronics Ltd.	

101386-1
PART NUMBER

USED ON

-