



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.:
C-101036

DIST

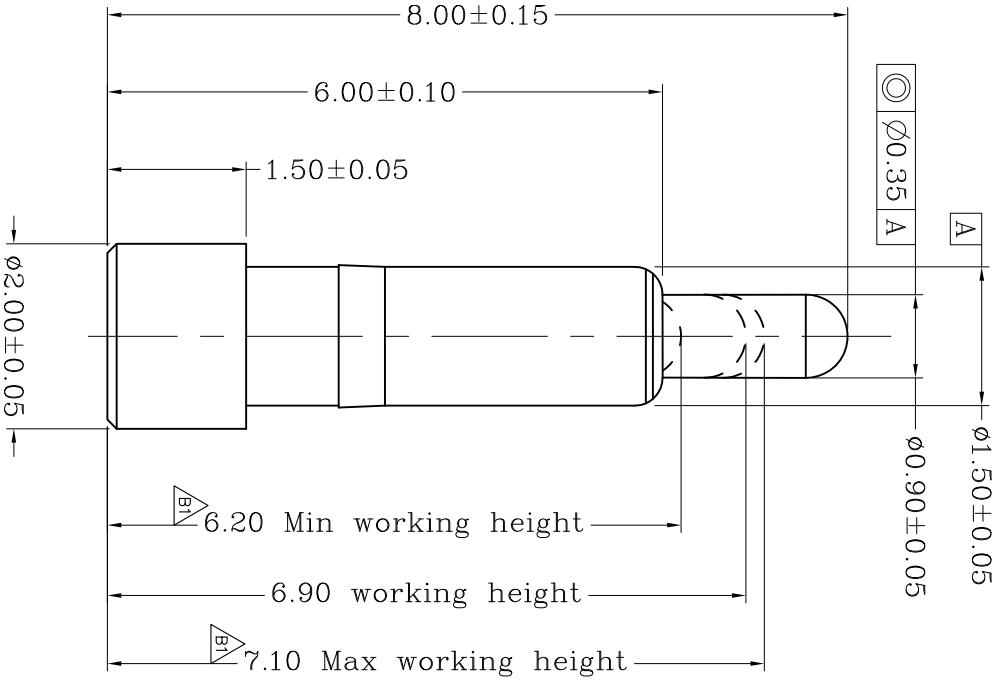

TOP-LINK

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 2.2>Warning: Working height are not permitted to be less than Min working height.
- 3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- 4 RoHS compliant.

Table 1 Mechanical performance

working height	6.90mm	110±30gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Min 0.1um Gold over 1.4~3.4um Nickel
2	Plunger	1	Leaded Brass	Min 0.4um Gold over 1.4~3.4um Nickel
3	Spring	1	Stainless steel wire	_____
4				
5				

B1	Renewal	2015/08/13
B	Renewal	2011/05/27
A	NEW	2007/04/03
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm		101036-1	
0.0 = ±0.15		DWN: Caiwanlu	APVD:		101036-1	
0.00 = ±0.10		CHK:	REL:		101036-1	
0.000 = ±0.05		Angle: ±1°			101036-1	
SURF. TEXTURE: REMOVE BURRS.		Name	POGO PIN	PG-2.0-1.5-1.5-6.0-8.0	101036-1	
BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.		Scale	Size	DWG No.	Page	Rev.
		1:1	A4	C-101036	1/1	B1

Top-Link Electronics Ltd.