



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
101025-1

LDC
-
DIST
-

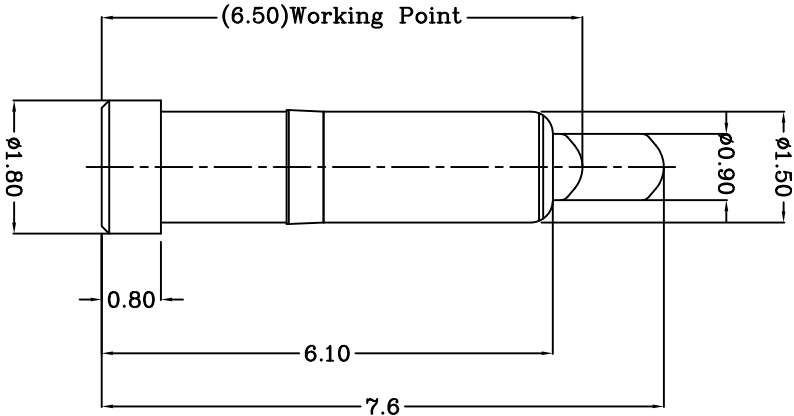

TOP-LINK

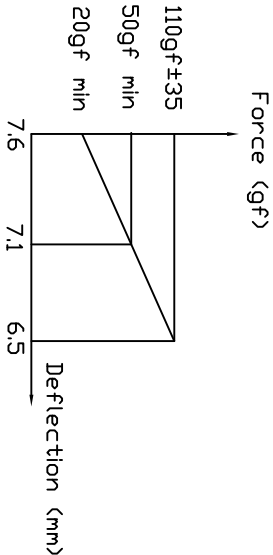

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.25um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.25um Nickel plating

3 Mechanical

1)Total stroke : 1.3mm

2)Durability: 10,000 cycle min.

Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-	0.0	= ±0.10	0.00	= ±-	0.000	= ±
ANGLE: ±1°							
SURF TEXTURE: 32/							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX							
DD NOT SCALE PRINT							
MATL	1	HT TR	—	FIN	—	—	—
DWN		APVD		Lansing			
Benny		REL					
CHK							
Andy							
NAME							
SCALE	1:1	A4	DWG NO.	101025-1	SHEET	1 OF 1	REV B
PGGD PIN							
PG-2.0-0.8-1.5-7.6							

USED ON

-

101025-1

PART NUMBER

Top-Link Electronics Ltd.