


DIST

DIST

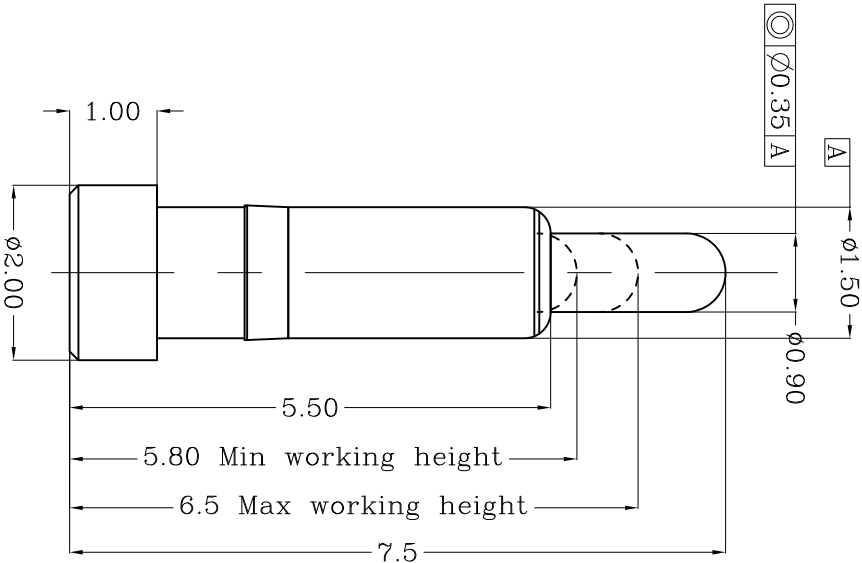

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um min over Ni 1.4um min
2	Plunger	1	Leaded Brass	Au 0.4um min over Ni 1.4um min
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Max working height	6.50mm	80gf min<2.1>
Min working height	5.80mm	165±35
Durability	10000cycle	

Not

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Warning: Working height are not permitted to be less than min working height.

3 Electrical performance

Resistance: 30mOhm Max.

B.1 Current rating: 2.0A

4 RoHS compliant.

			Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight		
			TOLERANCES UNLESS OTHER SPECIFIED			DWN:	APVD:	 Top-Link Electronics Ltd.			
	Renewal	2013/12/04	0.0 = ±0.15			Cai wanlu					
	Renewal	2007/08/03	0.00 = ±0.10			CHK:	REL:				
	NEW	2007/06/05	0.000 = ±0.005			Name POGO PIN					
			Angle: ±1°								
			SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.								
Rev.	Revision record.	Date.	Scale	Size	DWG No.	Page	Rev.				
			1:1	A4	C-101063	1/1	B.1				