



DWG NO.
C-101068

101068-1
PART NUMBER

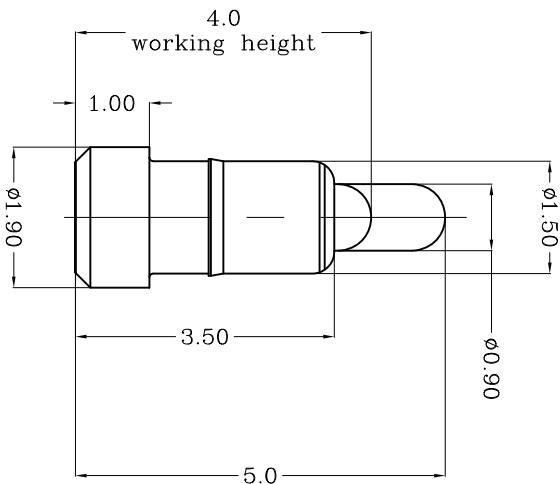

TOP-LINK

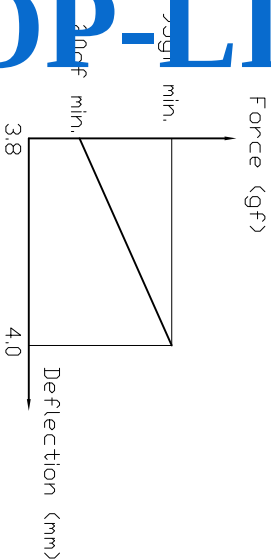

Notes:

Material: Δ

1)Plunger & Body : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1) Total stroke : 1.3mm

2)Durability: 10,000 cycle min.

4

1)Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

USED ON