



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101039

LDC
-
DIST
-

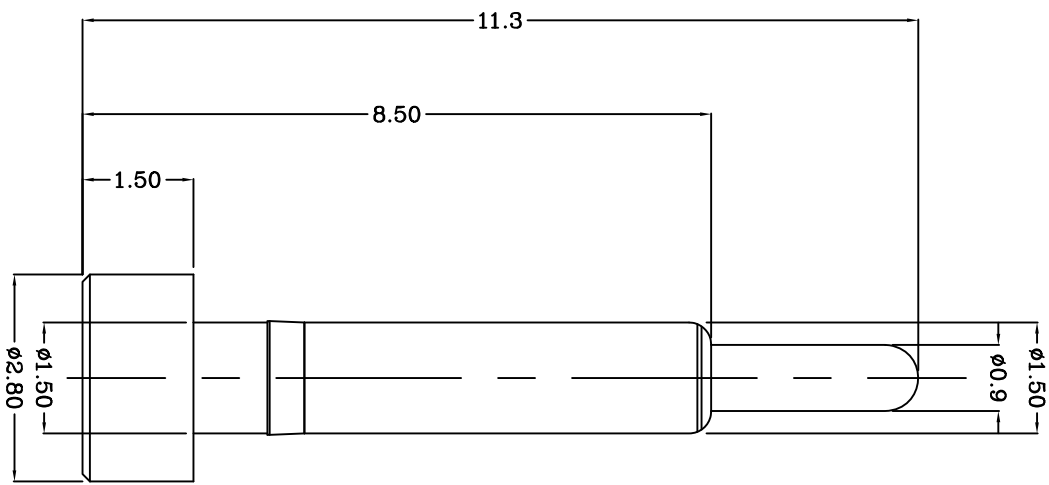

4


3

	更改力的规格		2007/05/20
LTR	REVISION	APVD	DATE
	RECORD		

2

1

TOP-LINK

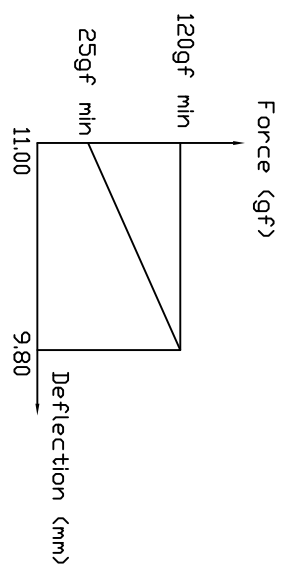

- Notes:
- Δ Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 2.5mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO.
			C-101039
			PG-2.8-1.5-1.5-11.3
			Top-Link Electronics Ltd.
			101039-1
			PART NUMBER
			FIN
			1 OF 1
			SHEET
			REV B

USED ON
-