
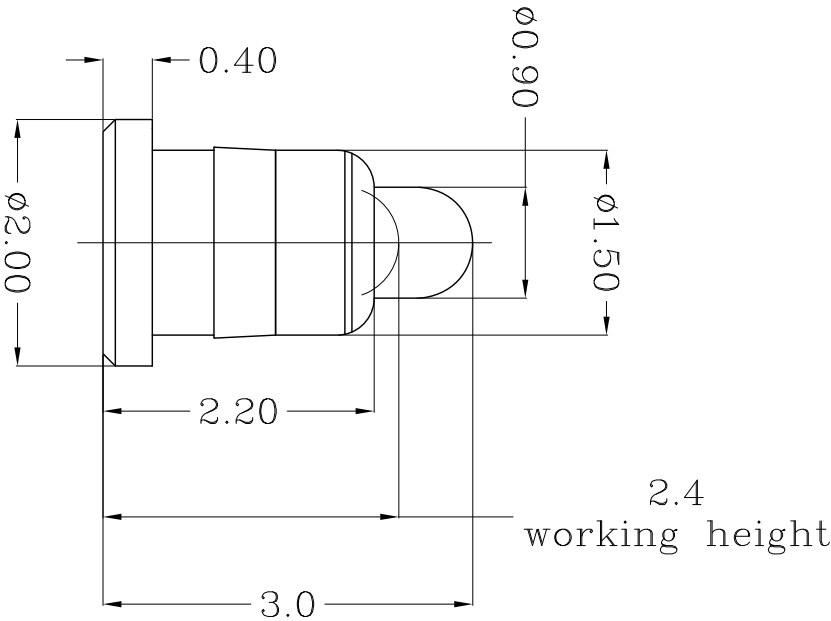




Notes:
① Material(材质):

- 1)Body : Brass
- 2)Plunge : Brass
- 3)Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1)Body: min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical(机械性能):
 - 1)Force: Min 90gf per pin at 0.5mm stroke (力: 下压0.5mm的力: 90gf Min)
 - 2)Total stroke(总行程) : 0.70mm
 - 3)Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
 - 1)Contact resistance(接触抵抗): 30mOhm Max.
 - 2)Voltage rating(额定电压): 36V DC Max
 - 3)Current rating(额定电流): 2.0A

LDC
-
DIST
-

	New		2008/07/24
L TR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM				MATL	①	HT TR	FIN
TOLERANCES UNLESS OTHER SPECIFIED				DWN	APVD		Top-Link Electronics
0 = ± -				Qin	REL		Top-Link Electronics Ltd.
0.0 = ± 0.15				CHK			
0.00 = ± 0.10							
0.000 = ±							
ANGLE: ±1°							
SURF TEXTURE: 32/				NAME	POGO PIN		
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				SCALE	A4	DWG NO.	PG-2.0-0.4-1.5-2.2-3.0
DO NOT SCALE PRINT				1:1		C-101245	

101245-1
PART NUMBER