



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101281

LDC
-
DIST
-

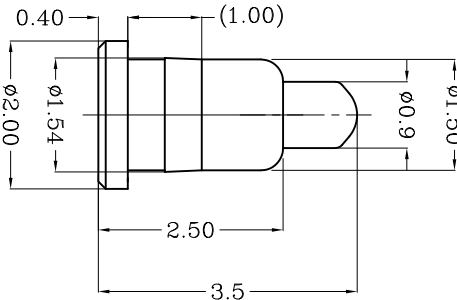

TOP-LINK

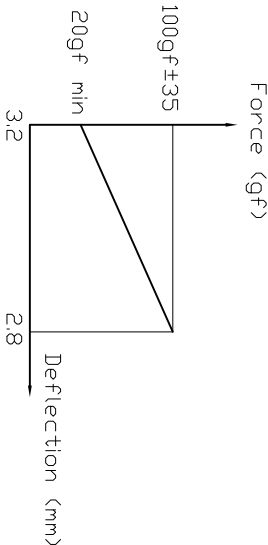

Notes:
Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
- 2)Spring : Stainless steel wire
- 2)Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 0.8mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON
-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±-		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	-
DWN		APVD	
CHK		REL	
NAME	POGO PIN Customer Drawing		
SCALE	1:1	A4	DWG NO.
			C-101281
			PG-2.0-0.4-1.5-2.5-3.5
			Top-Link Electronics Ltd.
			FIN
			-
			REV
			A

101281-1
PART NUMBER

4

3

2

1