



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101331

LDC
-
DIST
-

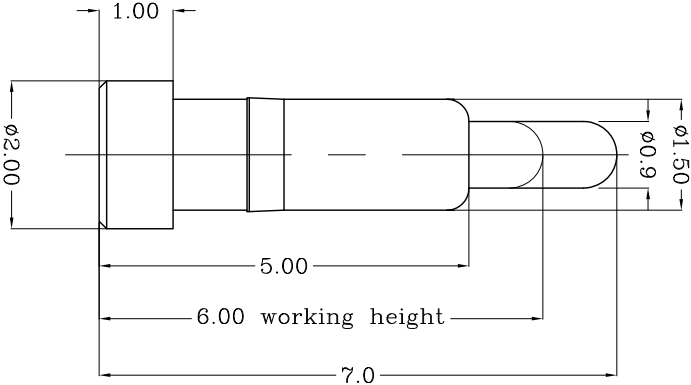

TOP-LINK

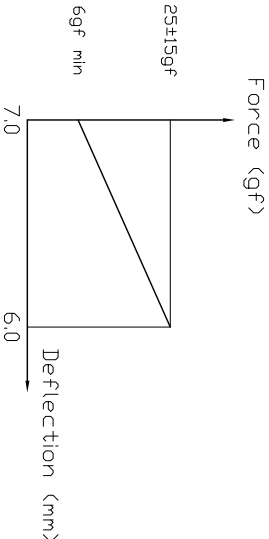

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
- 1)Total stroke : 2.0mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED DN

-

101331-1
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ± -		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			

MATL	HT TR	FIN
DWN	—	—
Jim	APVD	—
CHK	Lansing	—
Andy	REL	—

NAME	POGO PIN
PG-2.0-1.0-1.5-5.0-7.0	

SCALE	A4	DWG NO.	C-101331	SHEET 1 OF 1	REV A
-------	----	---------	----------	--------------	-------

4

3

2

1