



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101009

LOC
-
DIST
-

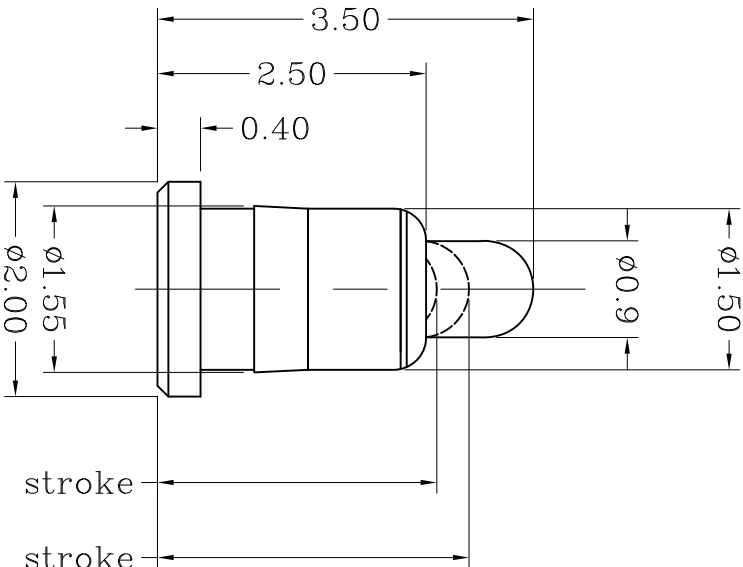

Notes:

- 1) Material:
1) Plunger & Body : CuZn36 Pb3, HO2 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2) Surface : Stainless steel wire
- 2 Plating
1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2) Plunger: Min 0.2um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
1) Total stroke : 0.9mm
2) Force : 100±30 gf at 0.6mm stroke.

TOP-LINK

USED ON

-

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 3.2/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
NAME		POGO PIN	
SCALE		PG-2.0-0.4-1.5-3.5	
1:1	A4	DWG NO.	C-101009
MATL		HT TR	FIN
DWN		APVD	
CHK		REL	
		Top-Link Electronics Ltd.	

PART NUMBER

101009-1

NEW		REVISED	DATE
LTR	RECORD	APVD	

4

3

2

1