




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101048

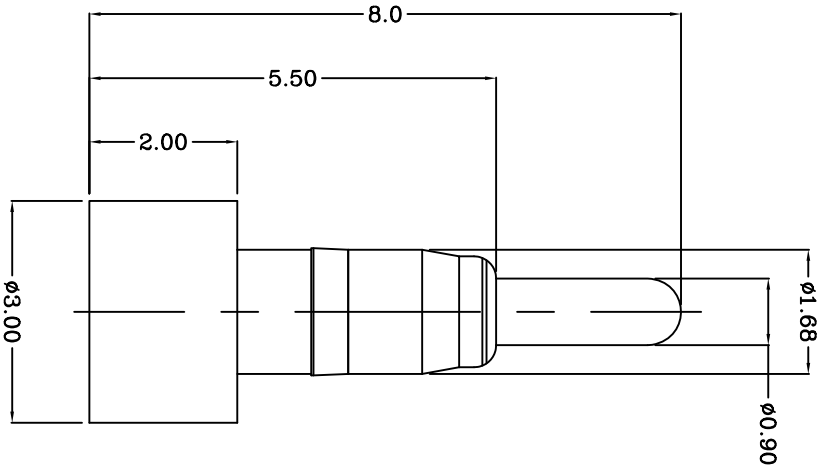

TOP-LINK

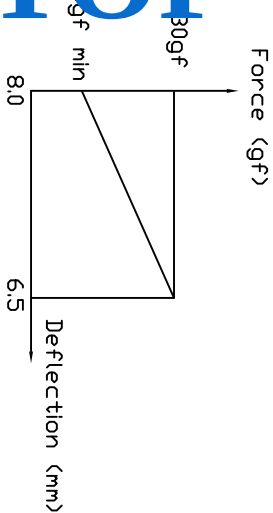

- Notes:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
 - 3)Plating
 - 4)Plunger: 0.5um Gold plating over 2.5um Nickle plating
 - 1)Total stroke : 2.5mm
 - 2)Durability: 10,000 cycle min.
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC MAX.

LDC
-
DIST
-

update force		8807/09/10
REVISION		
RECORD		
APVD		
DATE		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.10		
0.00	= ± -		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME			
PGGD PIN			
PG-3.0-2.0-1.68-8.0			
SCALE	A4	DWG NO.	FIN
1:1		C-101048	
SHEET			
1 OF 1			
REV			
B			

101048-1
PART NUMBER

USED ON

-