



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
101042-1

LDC
-
DIST
-

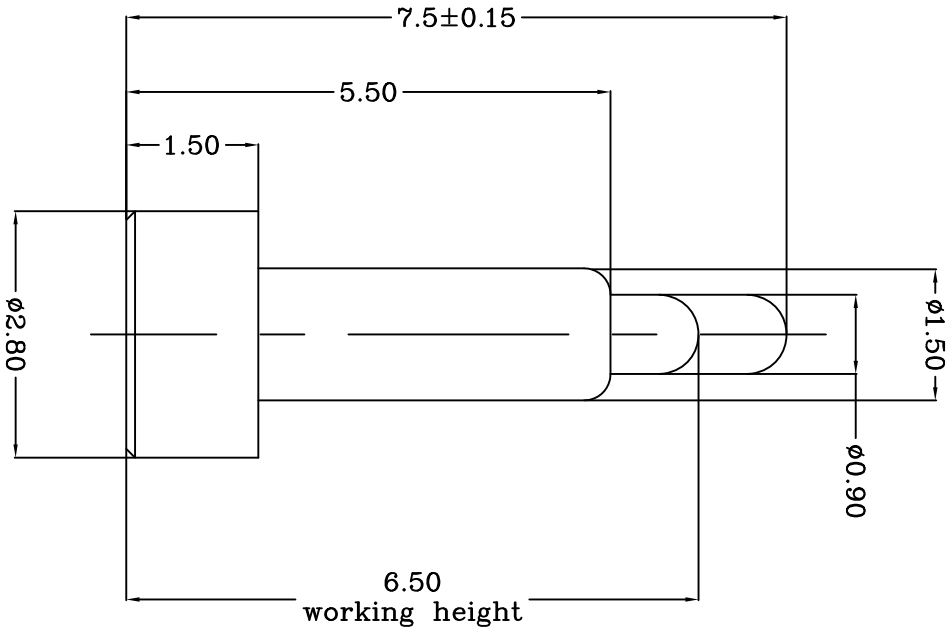

TOP-LINK

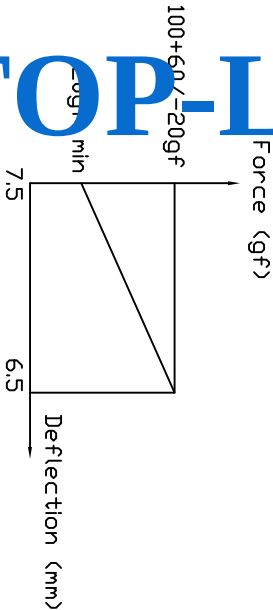

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating

3 Mechanical
1)Total stroke : 2.0mm
2)Durability: 10,000 cycle min.

4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED										MATL		HT TR		FIN									
0	= ± -																						
0.0	= ±0.15																						
0.00	= ± 0.10																						
0.000	= ±																						
ANGLE: ±1°																							
SURF TEXTURE: 32/ V																							
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX																							
DO NOT SCALE PRINT																							
										NAME		POGO PIN		SCALE		DWG		SHEET		REV			
										PG-2.8-1.5-7.5H		1:1		A4		NO.		C-101042-1		1 OF 1		B	
</																							