



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.




DWG NO.
C-101047-1

LDC
-
DIST
-

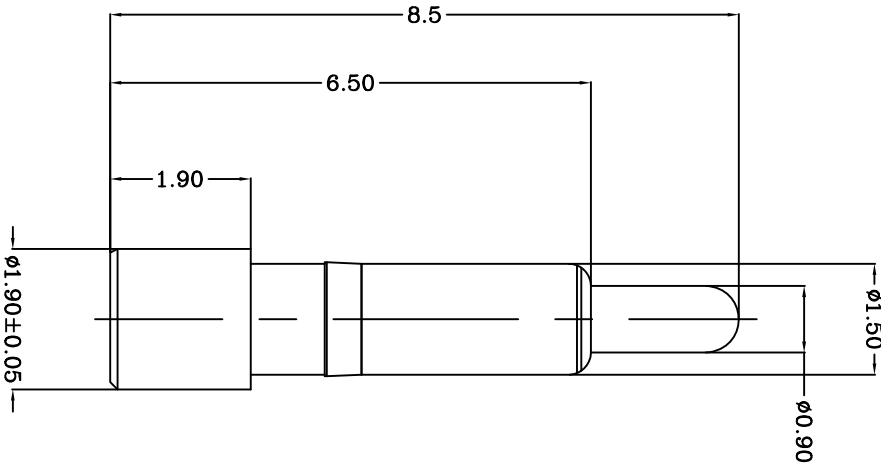

TOP-LINK

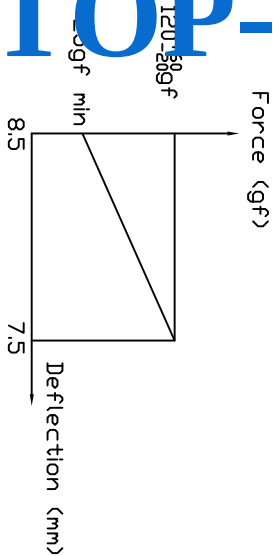

Notes:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
3 Electrical
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC MAX.

	改底部直径公差		0007/10/23
	NEW		0007/04/18
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
Benny		Lansing	
CHK		REL	
Andy			
NAME	POGO PIN		
SCALE	1:1	A4	DWG NO.
			C-101047-1
			PG-1.9-1.9-1.5-8.5
			Top-Link Electronics Ltd.
			101047-1
			PART NUMBER
			FIN
			1 OF 1
			REV A

USED ON

-