


DWG NO.
C-101010

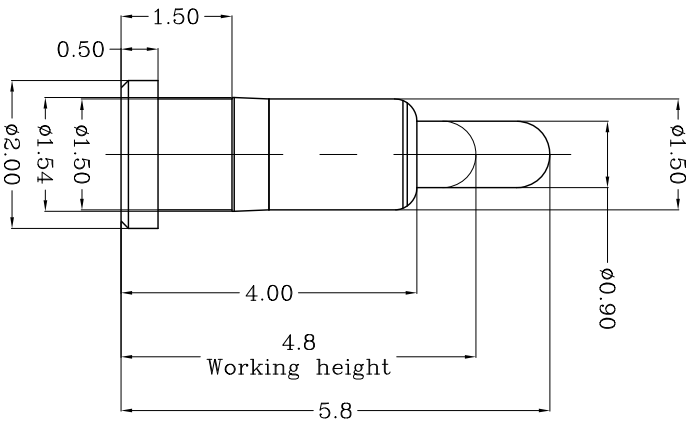

Notes:  Material (物质): 

- # TOPPING
- 1) Body : Brass
 - 2) Plunger : Brass
 - 3) Spring : Stainless steel wire
- ## 2. Plating (电镀):
- 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
- ## 3. Mechanical (机械性能):
- 1) Force: Min 90gf per pin at 1.0mm stroke
(力: Min 1.0mm 的力: Min 90gf)
 - 2) Total stroke (总行程) : 1.50mm
 - 3) Durability (寿命): 10,000 cycle min.
- ## 4. Electrical (电性能)
- 1) Contact resistance (接触抵抗): 30mOhm Max.
 - 2) Voltage rating (额定电压): 36V DC Max
 - 3) Current rating (额定电流): 2.0A

LOC		NAME P060 PIN PG-2.0-0.5-1.5-5.8H			
-	NEW				
		2010/03/04			
DIST	LTR	REVISION RECORD	APVD	DATE	
-					

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED	MATL	HT TR	FIN
0 = ±	DWN	APVD	—
0.0 = ±0.15	Qin	—	Top-Link
0.00 = ±0.10	REL		Electronics L.td.
0.0000 = ±.0000	CHK		
	—		

101010-1
PART NUMBER

USED ON