
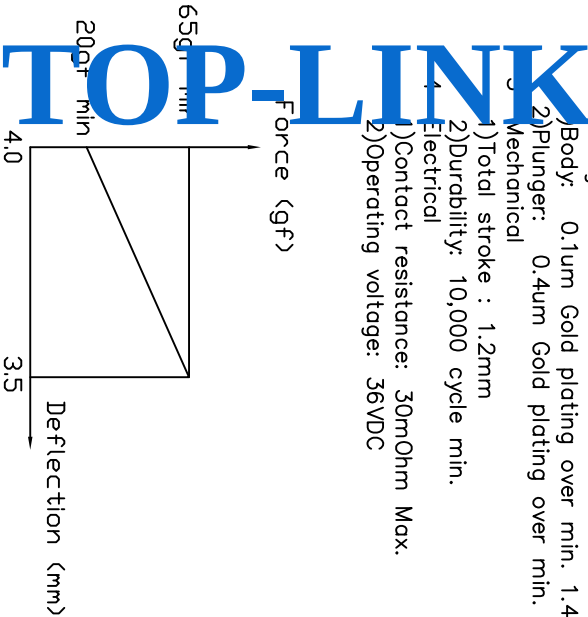


DWG NO.
C-101030

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

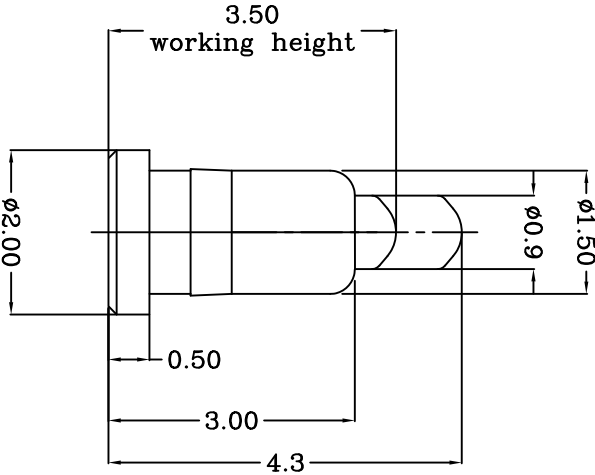

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2 or CuZn36(C2700).
 - 2)Spring : Stainless steel wire
 - 2 Plating
 - Body: 0.1um Gold plating over min. 1.4um Nickel plating
 - 2)Plunger: 0.4um Gold plating over min. 1.4um Nickel plating
 - 1)Total stroke : 1.2mm
 - 2)Durability: 10,000 cycle min.
 - 1)Electrical
 - Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

update remark		REV/DATE
REVISION	APVD	DATE
RECORD		
L TR		

DIMENSIONS IN MM			
TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -		
0.0	= ±0.15		
0.00	= ± 0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL	1	HT TR	FIN
DWN		APVD	
CHK		REL	
NAME			
PGGD PIN			
PG-2.0-0.5-1.5-4.3			
SCALE	A4	DWG NO.	C-101030
1:1			
SHEET			
1 OF 1			
REV			
D			

Top-Link
Electronics
Ltd.

PART NUMBER

101030-1

USED ON

-