


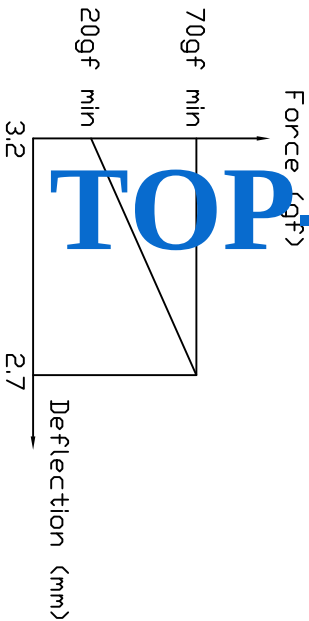


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

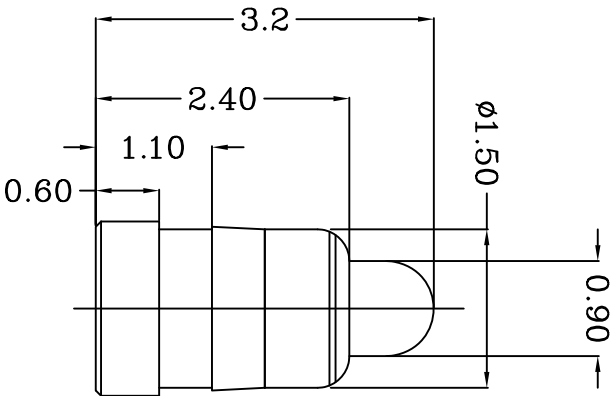

DWG NO.
C-101022

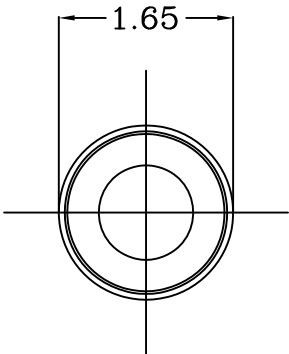

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000) or CuZn39 PB3 or CuZn38 PB2.
 - 2)Spring : Stainless steel wire
 - 2 Plating
 - 1)Body: 1.4um Gold plating over 1.4um Nickle plating
 - 2)Plunger: 0.4um Gold plating over 1.4um Nickle plating
 - 3 Electric
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC Max.

USED DN

101022-1

PART NUMBER

Top-Link
Electronics
Top-Link
Electronics Ltd.

MATL	HT	TR	FIN
DWN	APVD	REL	FIN
CHK	REL	REL	FIN
NAME	POGO PIN	PG-165-06-15-2-4-3-2	FIN

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

SCALE	A4	DWG	C-101022	SHEET	REV
1:1	A4	NO.	C-101022	1 OF 1	B

Update remark

2007/09/14

REVISION
RECORD

APVD

DATE

LTR

LDC

DIST

4

3

2

1