



DWG NO.
C-101268

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

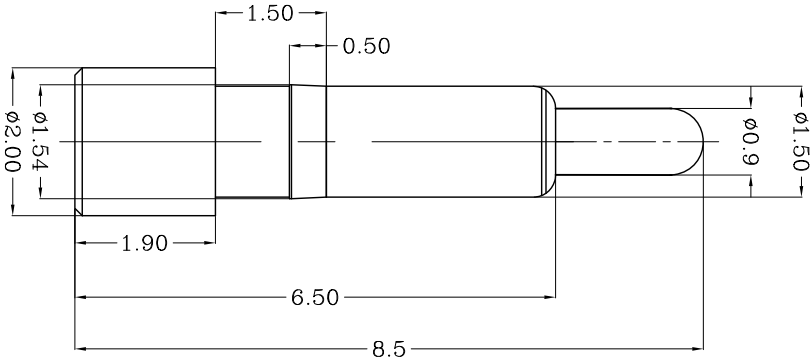

TOP-LINK

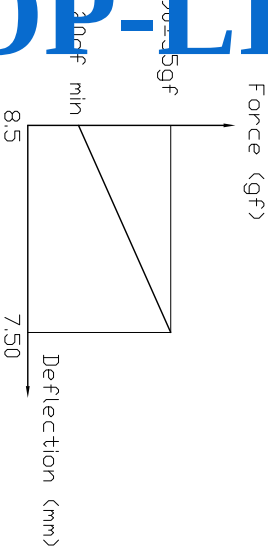

- Notes:
- Material:
- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
- 1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
- 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
- 3 Mechanical
- 1)Total stroke : 1.8mm
- 2)Durability: 10,000 cycle min.
- 4 Electrical
- 1)Contact resistance: 30mOhm Max.
- 2)Operating voltage: 36VDC

USED ON
-

101268-1

PART NUMBER

Top-Link
Electronics
Top-Link
Electronics Ltd.

MATL	HT TR	FIN
	-	

DWN	APVD	REL
0.0 = ±0.15		
0.00 = ±0.10		
0.000 = ±		

NAME: POGO PIN

PG-2.0-1.9-1.5-6.5-8.5

SCALE	A4	DWG NO.	SHEET	REV
1:1		C-101268	1 OF 1	A

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED

0 = ±

0.0 = ±0.15

0.00 = ±0.10

0.000 = ±

ANGLE: ±1°

SURF TEXTURE: 32/

REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

NEW	2008/09/09
REVISION RECORD	DATE
APVD	
L TR	

4

3

2

1