THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

DWG NO. C-101198

USED ON
—

Notes:
1 Material:
1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
2)Spring : Stainless steel wire
2 Plating
1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating
3 Mechanical
1)Total stroke : 1.3mm
2)Durability: 10,000 cycle min.
4 Electrical
1)Contact resistance: 30mOhm Max.
2)Operating voltage: 36VDC

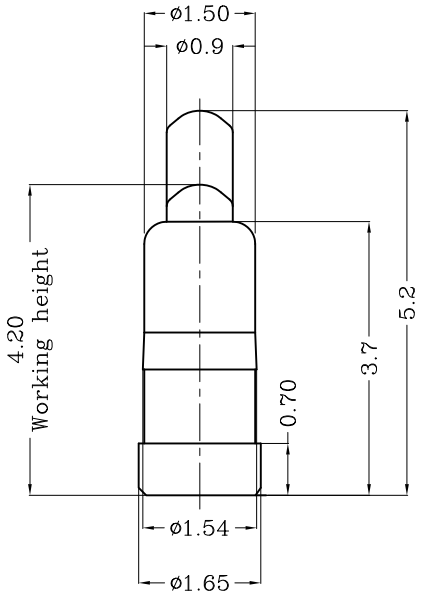

TOP-LINK

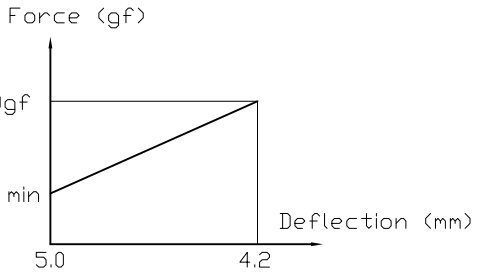

101198-1
PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED 0 = ±- 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1° SURF TEXTURE: 3.2 REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT	MATL 1	HT TR —	FIN —
	DWN	APVD	Top-Link Electronics Ltd.
	CHK	REL	
	NAME: POGO PIN PG-1.65-0.7-1.5-5.2		
	SCALE 1:1	A4	DWG NO. C-101198
	SHEET 1 OF 1	REV A	

LTR	REVISION RECORD	APVD	DATE
	NEW		2008/05/06

LOC	DIST
-	-

4 3 2 1

D C B A