



DIST

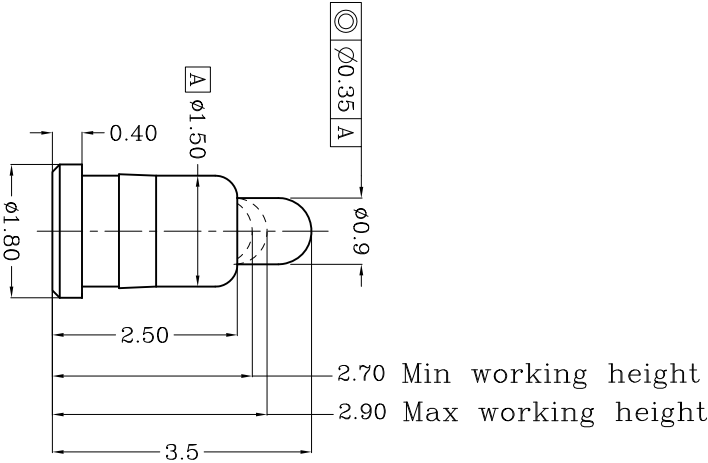


Table 1 Mechanical performance		
Max working height	2.90mm	80±25gf <2.1>
Min working height	2.70mm	105±30gf
Durability	10000cycle	

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

TOP LINK

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

	NEW	
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm		Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	APVD:		Top-Link Electronics Top-Link Electronics Ltd		
0.0 = ± 0.15		Qin zuozhong					
0.00 = ± 0.10		REL:					
0.000 = ± 0.05							
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT.							
Angle: ±1°		Name POGO PIN					
Scale	Size	DWG No.	Page		Rev.		
1:1	A4	C-101259	1/1		B		

Top-Link Electronics Ltd.

101259-1
PART NUMBER