


DWG NO. C-101045

	更正规格描述		8007/05/20
LTR	REVISION RECORD	APVD	DATE

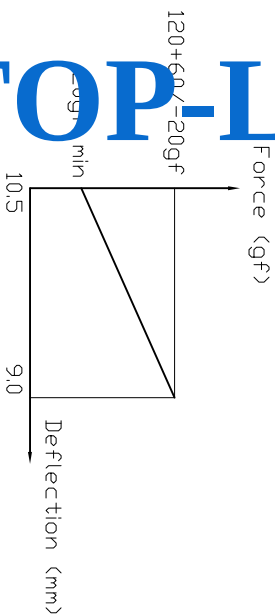

Δ Material:

- 1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.
- 2)Spring : Stainless steel wire
- 2 Plating
 - 1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
 - 2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3 Mechanical
 - 1)Total stroke : 1.8mm
 - 2)Durability: 10,000 cycle min.
- 4 Electrical
 - 1)Contact resistance: 30mOhm Max.
 - 2)Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED				MATL				HT TR		FIN	
0 = ± 0.0 = ±0.10 0.00 = ±0.10 0.000 = ± ANGLE, ±1°				DWN		Benny		APVD		Lensing	
SURF TEXTURE: 3.2/ 				CHK		Andy		REL		Top-Link Electronics	
REMOVE BURRS, BREAK SHARP EDGES, R0.05 MAX DO NOT SCALE PRINT				NAME		PGGD PIN		PG-2-8-1.5-10.5H		Top-Link Electronics Ltd.	
SCALE		A4		DWG NO.		C-101045		SHEET 1 OF 1		REV B	

101045-1	PART NUMBER
----------	-------------

USED ON

1