
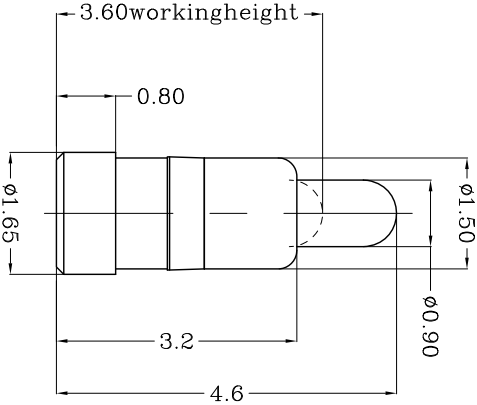




Notes:
△ Material(材质):
1) Body : Brass
2) Plunge : Brass
3) Spring : Stainless steel wire
2 Plating(电镀):
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
3) Electrical(机械性能):
1) Force: 100±80gf per pin at 1.0mm stroke (力: 下压1.0mm的力: 100±80gf)
2) Total stroke(总行程) : 1.20mm
3) Durability(寿命): 10,000 cycle min.
4) Electrical(电性能)
1) Contact resistance(接触阻抗): 30mOhm Max.
2) Voltage rating(额定电压): 36V DC Max
3) Current rating(额定电流): 2.0A

LDC
-
DIST
-

	NEW			2010/08/12
L TR	REVISION	APVD	DATE	
	RECORD			

DIMENSIONS IN MM				
TOLERANCES UNLESS OTHER SPECIFIED				
0	= ± -			
0.0	= ±0.10			
0.00	= ± 0.05			
0.000	= ±			
ANGLE: ±1°				
SURF TEXTURE: 32/				
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX				
DO NOT SCALE PRINT				
NAME		POGDO PIN		
SCALE		PG-1.65-0.8-1.5-3.3-4.6		
1:1		C-101450		
A4		DWG NO.		
A4		C-101450		
REL		SHEET		
REL		1 OF 1		
REL		REV		
REL		A		

101450-1
PART NUMBER

USED ON

-