


DWG NO.

C-101066

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

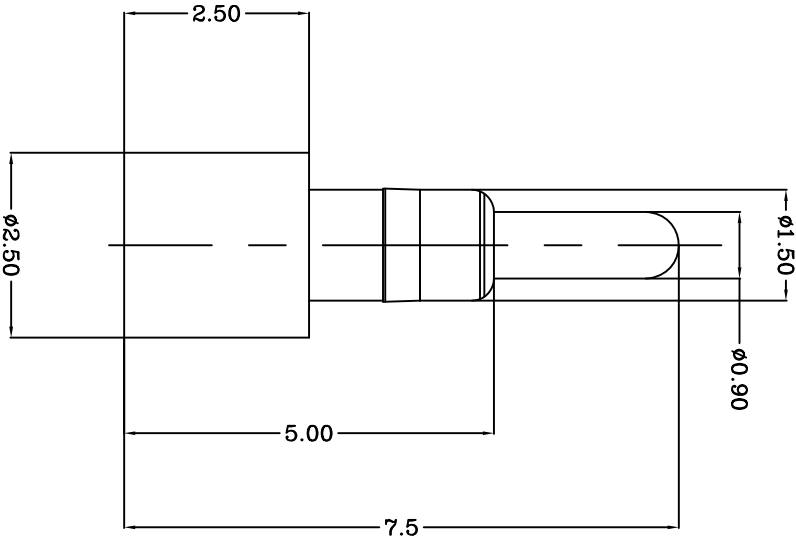

TOP-LINK

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire


2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

3 Mechanical

Force:135±30gf at 1.0mm stroke

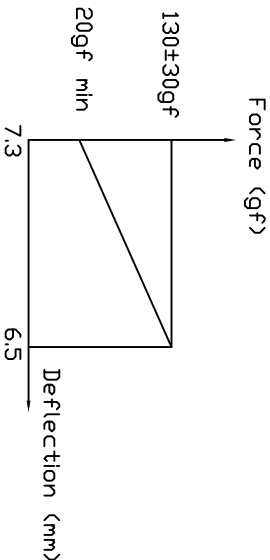

USED DN

101066-1

PART NUMBER

MATL	1	HT TR	—	FIN	—	✓
------	---	-------	---	-----	---	---

TOLERANCES IN MM

OTHER SPECIFIED

0

= ±-

0.0

= ±0.15

0.00

= ±0.10

0.000

= ±

ANGLE: ±1°

SURF TEXTURE: 3.2/

REMOVE BURRS, BREAK

SHARP EDGES R0.05 MAX

DD NOT SCALE PRINT

NAME

PGGD PIN

PG-2.5-2.5-1.5-5.0-7.5

SCALE

1:1

A4

DWG

NO.

C-101066

SHEET

1 OF 1

REV

A

Top-Link

Electronics Ltd.

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics

Electronics