



DWG NO.
C-101284

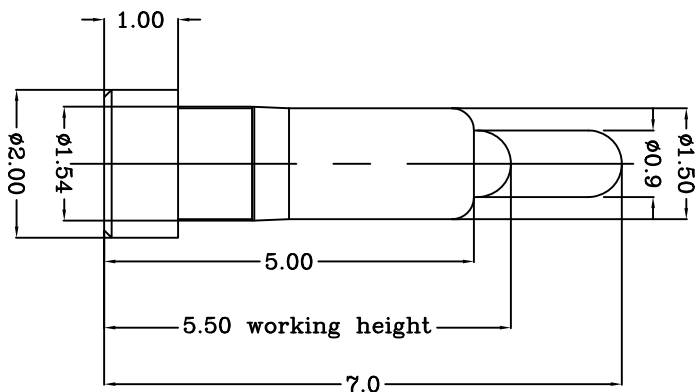

TOP-LINK

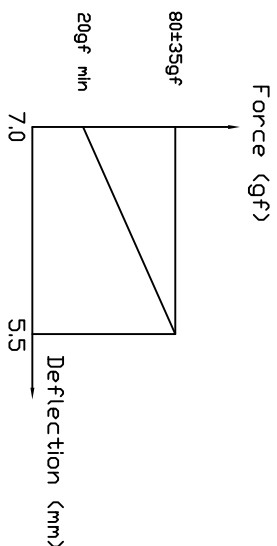

Notes:
 Material:

⚠ Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2) Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1) Total stroke : 2.0mm

2)Durability: 10,000 cycle min.

4 Electrical

1) Contact resistance: 30mOhm Max.

2) Operating voltage: 36VDC

	NEW		2008/10/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MTRL		HT TR		FIN	
0 = ± 0.0 = ±0.15 0.00 = ±0.10 0.000 = ± ANGLE: ±1°		DWN		APVD		Top-Link Electronics	
SURF TEXTURE: 32/		Aln		Lansing		Top-Link Electronics L td.	
REMOVE BURRS, BREAK SHARP EDGES, R0.05 MAX		CHK		REL			
DO NOT SCALE PRINT		Jlm					
		NAME		PGGD PIN			
		SCALE		PG-2.0-1.0-1.5-5.0-7.0			
		1:1		A4			
		DWG NO.		C-101284			
		SHEET 1 OF 1		REV A			

101284-1	PART NUMBER
----------	-------------

USED ON