
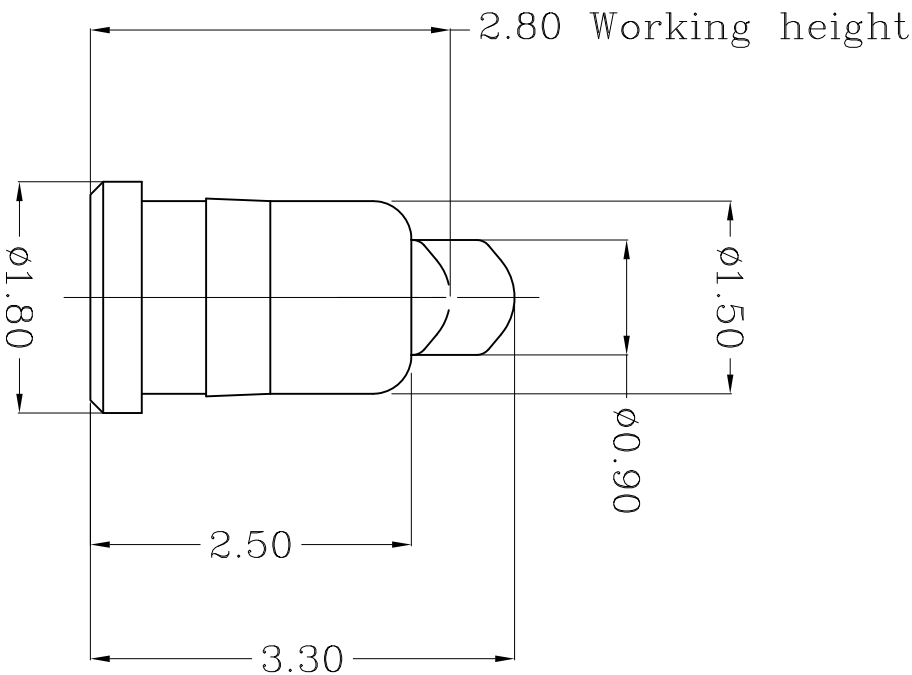




TOP-LINK

Table 1 Mechanical performance		
working height	2.80mm	70gf Min
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

1 Dimensions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

3 The force is the average of forces obtained when plunger goes downwards and upwards.

4 Electrical performance

5 Resistance:30mOhm Max.

Current rating: 2.0A

RoHS compliant.

101080-1
PART NUMBER

Type	Unit	Weight
Customer drawing	mm	_____

Top-Link Electronics Ltd.
TOLERANCES UNLESS OTHER SPECIFIED
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±0.05
Angle: ±1°
SURF. TEXTURE:
REMOVE BURRS.
BREAK SHARP EDGES
R0.05 MAX. DO NOT SCALE PRINT.

DWN: Cai wonlu
CHK: REL:

Top-Link Electronics
Top-Link Electronics Ltd.

Update	2015/08/05
update remark	2012/10/10
Revision record.	Date.

Name	Size	DWG No.	Page	Rev.
POGO PIN	A4	C-101080	1/1	D1