

proposal

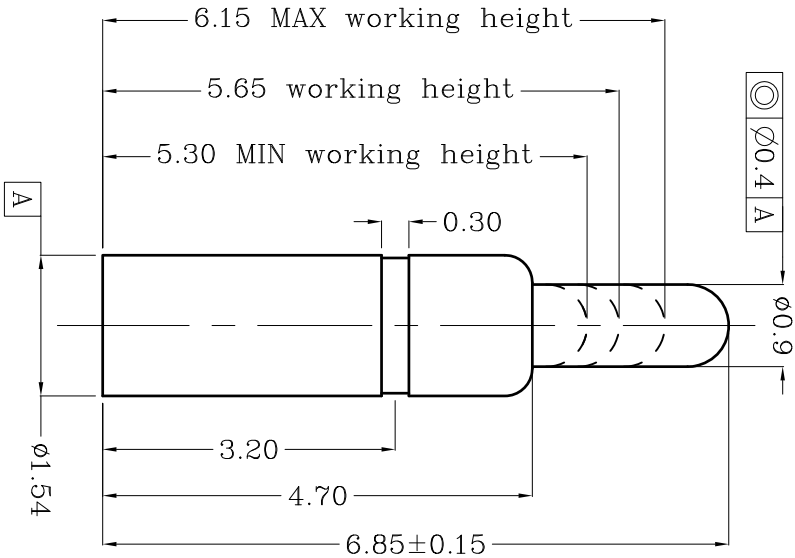


Table 1 Mechanical performance

Working height	5.65mm	100±20gf <2.1>
Durability	10,000cycle	

Notes:

- 1 Dimensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
- 3 Warning: Working height are not permitted to be less than min working height.
- 3 Electrical performance
- Resistance: 30mOhm Max.
- Current rating: 2.0A
- 4 RoHS compliant.

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Rev.	Revision record.	Date.
1	NEW	2013/03/29
2	Update	2013/04/08

Top-Link Electronics Ltd.	Type	Unit	Weight
TOLERANCES UNLESS OTHERWISE SPECIFIED	Customer drawing	mm	
0.0 = ±0.15	DWN: Cai wanlu	APVD:	
0.00 = ±0.10	CHK:	REL:	
0.000 = ±0.05	Angle: ±1°		
Angle: ±1°	NAME	POGO PIN	
SURF. TEXTURE: REMOVE BURRS.	Scale	Size	DWG No.
BREAK SHARP EDGES R0.05 MAX, DO NOT SCALE PRINT.	1:1	A4	C-101724

Top-Link Electronics Ltd.

101724-1
PART NUMBER