




THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
101040

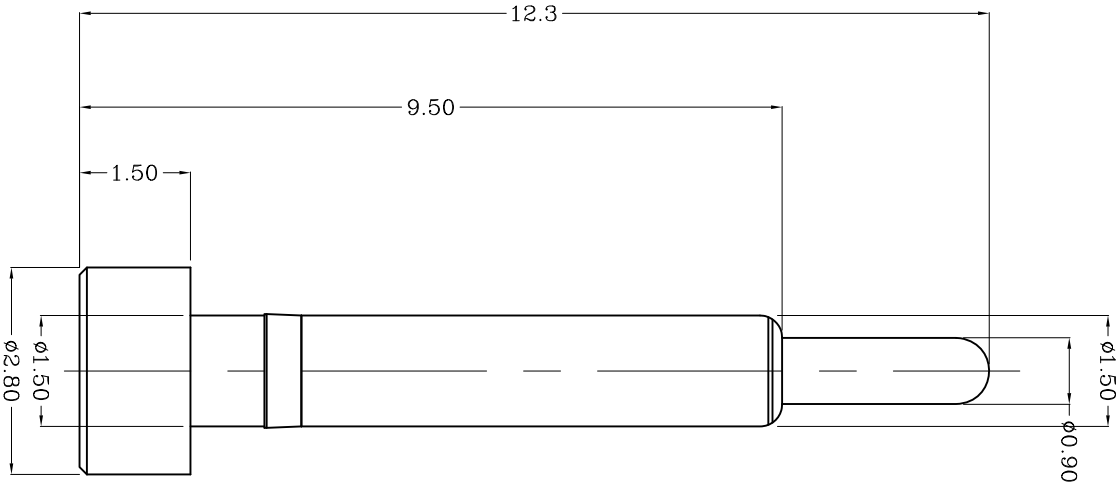

TOP-LINK

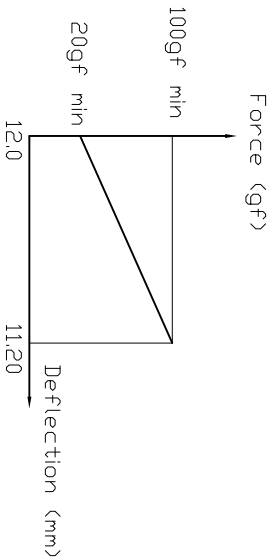

Notes:

Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)

or CuZn39 PB3 or CuZn38, PB2 or CuZn36(C2700).

2)Spring : Stainless steel wire

2)Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

2)Plunger: Min 0.4um Gold plating over min. 2.5um Nickel plating

3)Mechanical

1)Total stroke : 2.5mm

2)Durability: 10,000 cycle min.

4)Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 36VDC

USED ON

-

101040-1

PART NUMBER

Top-Link
Electronics Ltd.

A

B

C

D

LDC

-

DIST

-

NEW

REVISION

RECORD

APVD

DATE

0007/11/08

32/

SURF TEXTURE:

ANGLE: ±1°

REMOVE BURRS, BREAK

SHARP EDGES R0.05 MAX

DO NOT SCALE PRINT

NAME

PGGD PIN

PG-2.8-1.5-1.5-12.3

SCALE

1:1

A4

DWG

NO.

101040

SHEET

1 OF 1

REV

A

4

3

2

1