


proposal

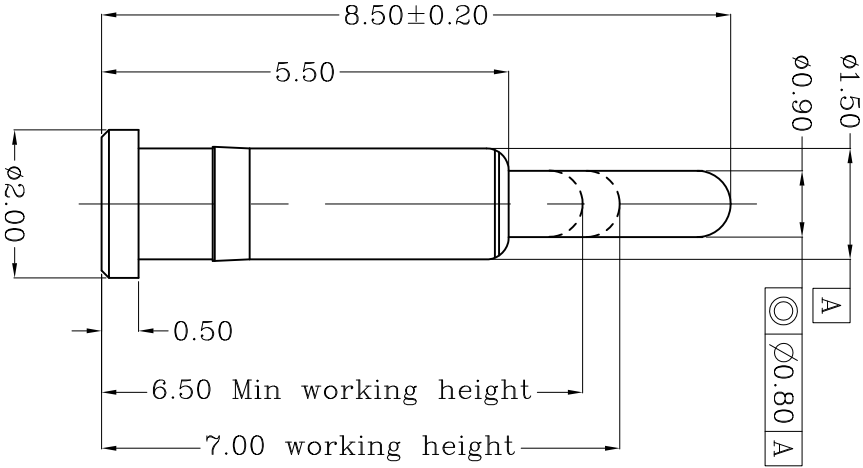

Item	Part name	Q'ty/Ed	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um plating Ni 1.4um
2	Plunger	1	Leaded Brass	Au 0.4um plating Ni 1.4um
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	7.00mm	80gf min
Durability	10000cycle	

- Not
- 1 Dimensions shall be interpreted per ASME Y14.5M.
 - 2 Mechanical performance(See the table 1)
 - <2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2> Warning: Working height are not permitted to be less than the working height.
 - 3 Electrical performance
 - Resistance: 30mOhm Max.
 - Current rating: 2.0A
 - 4 RoHS compliant.

	Update	2013/05/06
	NEW	2013/04/29
Rev.	Revision record.	Date.

Top-Link Electronics Ltd.		Type	Unit	Weight	PART NUMBER	
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Customer drawing	mm	101740-1	
0.0 = ±0.15		CHK:	Cai wonlu	APVD:	Top-Link Electronics Ltd.	
0.00 = ±0.10		REL:				
0.000 = ±0.005		Name	POGO PIN			
SURF. TEXTURE:		Scale	1:1	Size	A4	DWG No.
REMOVE BURRS.						C-101740
BREAK SHARP EDGES						Page
R0.05 MAX. DO NOT SCALE PRINT.						1/1
						Rev.
						2