



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.
C-101397

LDC	-
DIST	-

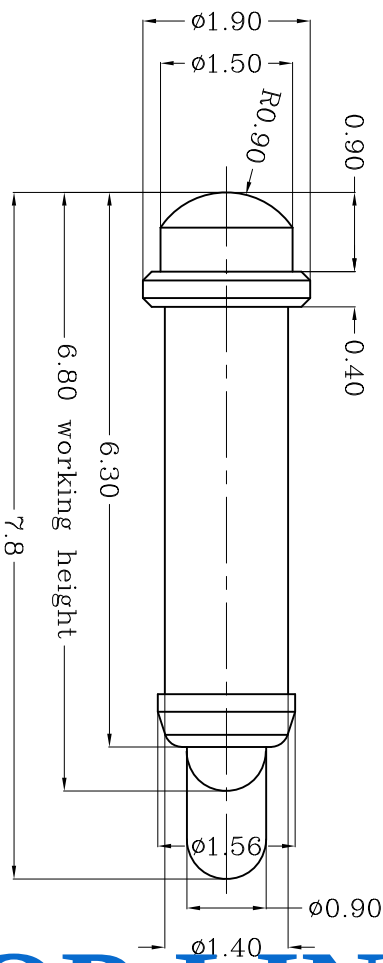

TOP-LINK

Notes:

1)Body : C36000

2)Plunge : C36000 or C27000

3)Spring : Stainless steel wire

Plating(电镀):

1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1)Force: 110±30gf per pin at 1.0mm stroke

(力: 下压1.0mm的力: 110±30gf)

2)Total stroke(总行程) : 1.40mm

3)Durability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1)Contact resistance(接触抵抗): 30mOhm Max.

2)Voltage rating(额定电压): 36V DC Max

3)Current rating(额定电流): 2.0A

DIMENSIONS IN MM			
TOLERANCES UNLESS			
OTHER SPECIFIED			
0	= ±-		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 3.2/			
REMOVE BURRS, BREAK			
SHARP EDGES R0.05 MAX			
DD NOT SCALE PRINT			
NAME	HT	TR	FIN
PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8	PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8	PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8	PG-1.5-0.9-2.0-0.4-1.4-6.3-7.8
SCALE	SCALE	SCALE	SCALE
1:1	1:1	1:1	1:1
A4	A4	A4	A4
ND	ND	ND	ND
C-101453	C-101453	C-101453	C-101453
SHEET	SHEET	SHEET	SHEET
1 OF 1	1 OF 1	1 OF 1	1 OF 1
REV	REV	REV	REV
1	1	1	1

101453-1

PART NUMBER

Top-Link
Electronics Ltd.

USED DN

-