



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWG NO.  
C-101390

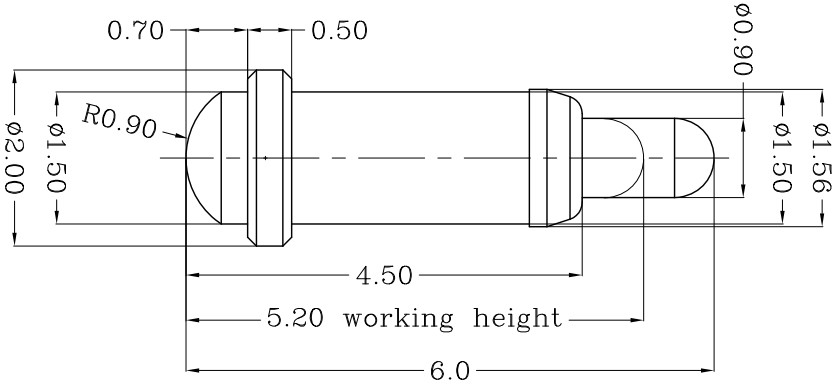

Notes:

1) Material(材质):

1) Body : C36000

2) Plunge : C36000 or C27000

3) Spring : Stainless steel wire

2 Plating(电镀):

1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical(机械性能):

1) Force: 100±30gf per pin at 0.8mm stroke

(力: 压0.8mm的力: 100±30gf)

2) Total stroke(总行程) : 1.40mm

3) Reliability(寿命): 10,000 cycle min.

4 Electrical(电性能)

1) Contact resistance(接触抵抗): 30mOhm Max.

2) Voltage rating(额定电压): 36V DC Max

3) Current rating(额定电流): 2.0A

TOP-LINK

USED DN

101390-1

PART NUMBER

| MATL | HT TR | FIN |
|------|-------|-----|
| 1    | —     | —   |

| DWN   | APVD  | Top-Link Electronics Ltd. |
|-------|-------|---------------------------|
| 0     | ±0.15 |                           |
| 0.0   | ±0.10 |                           |
| 0.000 | ±     |                           |

| NAME                           | PGGD PIN |
|--------------------------------|----------|
| PG-1.5-0.7-2.0-0.5-1.5-4.5-6.0 |          |

| SCALE | A4 | DWG NO. | C-101390 |
|-------|----|---------|----------|
| 1:1   |    |         |          |

| SHEET  | REV |
|--------|-----|
| 1 OF 1 | A   |

DIMENSIONS IN MM  
TOLERANCES UNLESS  
OTHER SPECIFIED  
0 = ±  
0.0 = ±0.15  
0.00 = ±0.10  
0.000 = ±  
ANGLE: ±1°

SURF. TEXTURE: 3.2/  
REMOVE BURRS, BREAK  
SHARP EDGES R0.05 MAX  
DID NOT SCALE PRINT

NEW

REVISION  
RECORD

APVD

DATE

LTR

SCALE

A4

DWG NO.

C-101390

SHEET

REV

A