
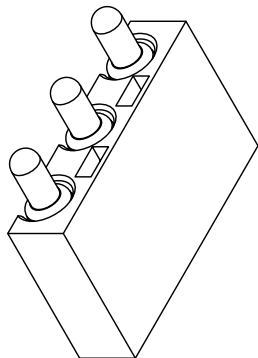
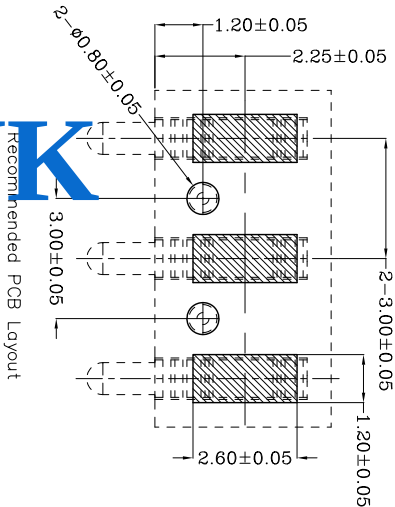



DWG NO.
C-100574

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC	-
DIST	-

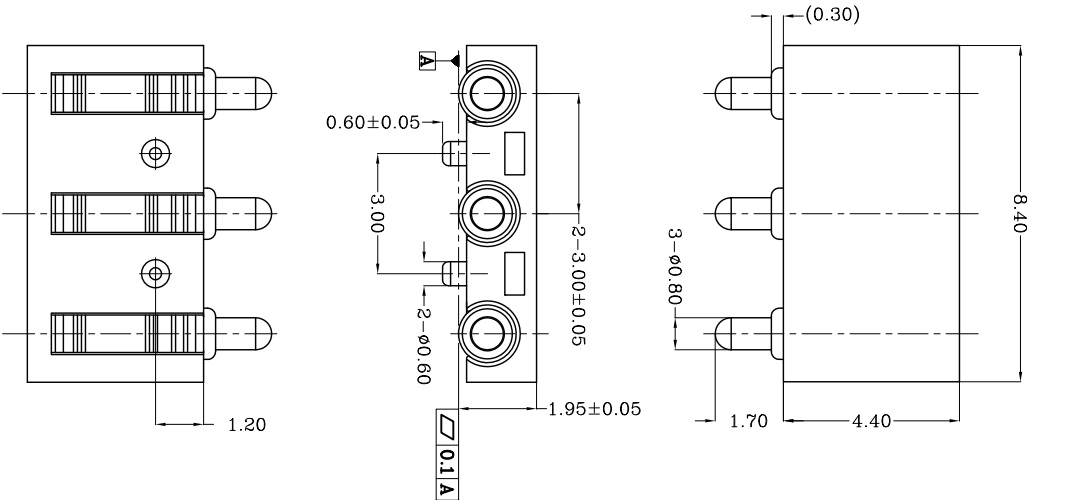

TOP-LINK

Notes:

1 Material(材质):

Housing: HTN, UL94 V-0 Color Black.

Contact: Brass

Spring :Stainless steel wire

2 Plating:

Body: Min 0.1um Gold plating over min. 1.4um Nickel plating

(Body: 镀金0.1um Min 镍底1.4um Min)

Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating

(Plunger: 镀金0.4um Min 镍底1.4um Min)

3 Mechanical:

Force:120 $\pm$ 25gf per pin at 1.0mm stroke

(力:下压1.0mm的力:140 $\pm$ 25gf)

Total stroke(总行程): 1.40mm

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF. TEXTURE: 3.2/ √			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX			
DO NOT SCALE PRINT			
MATL		HT TR	FIN
DVN	APVD	—	— √
QIN		<i>Top-Link</i> <u>Electronics</u>	Top-Link Electronics Ltd
CHK	REL		
NAME POGO CONNECTOR 3 POSITIONS RIGHT ANGLE			
PGC-144-6.1-RA-3P-3.0PH			
SCALE	A4	DWG NO.	SHEET
1:1		C-100574	1 OF 1
			REV A