





THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK ELECTRONICS FACTORY

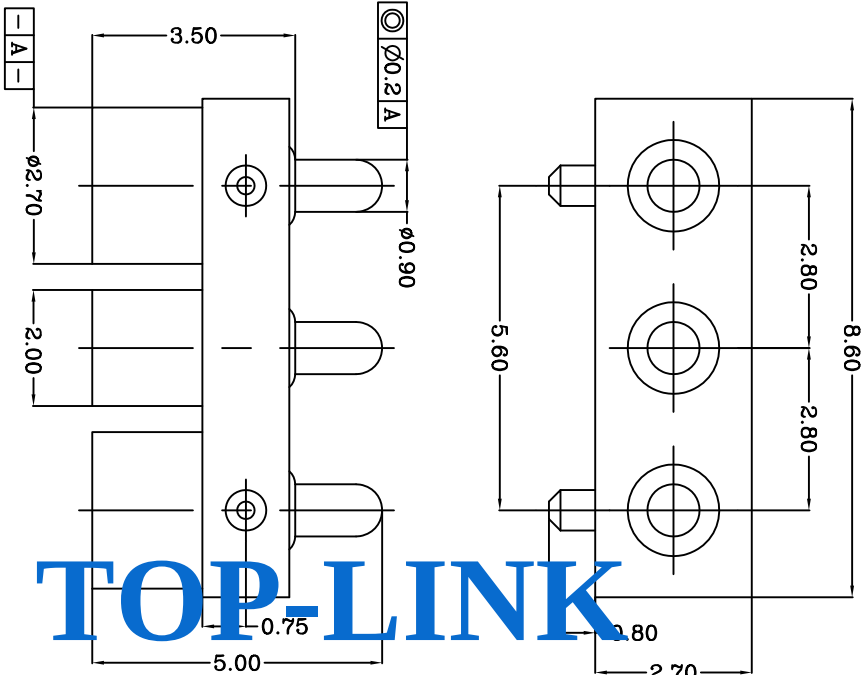

DWG NO.
C-100002

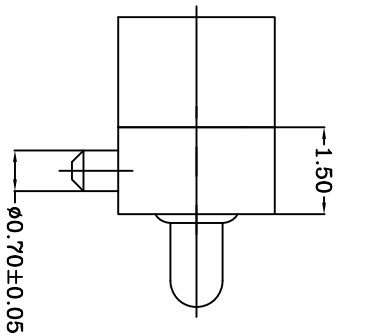

TOP-LINK

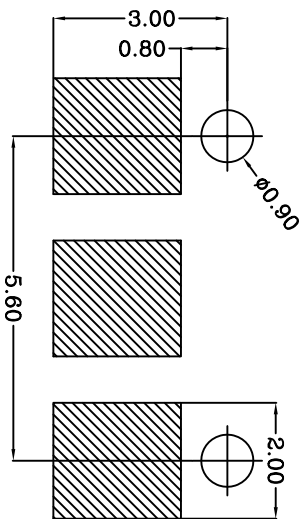

Recommended P.C.B.
layout (Component Side)

- Notes:
- 1 Material, Housing: PA 4,6 (30% Glass Filled)
Color Black, (UL94V-0)
 - 2 Mechanical demands:
Full stroke: 1.4mm
Plating plunger: Min 0.4um Au over 1.4um Ni
Plating body: Min 0.1um Au over 1.4um .

LDC
-
DIST
-

增次同軸度
NEW
REVISION
RECORD
APVD
DATE
8007/04/03
8009/06/18

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 32/
REMOVE BURRS, BREAK
SHARP EDGES R0.05 MAX
DD NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	—
Benny	Lansing	—
CHK	REL	—
Andy		—
NAME	BATTERY CONNECTOR 3 POS. RIGHT ANGLE	
SCALE	1:1	
A4	DWG	
ND.	C-100002	
SHEET	1 OF 1	
REV	B	

100002-3
PART NUMBER

USED ON

-