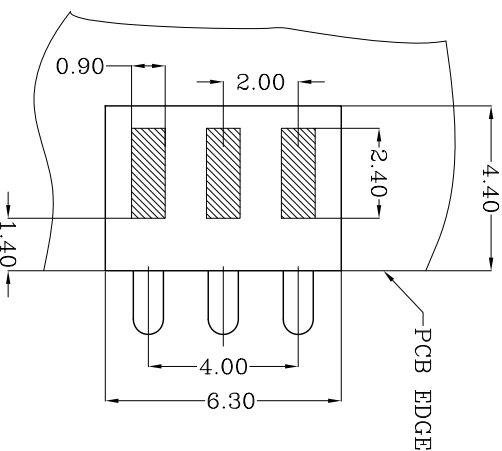

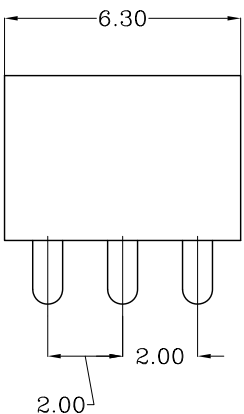



Application status 2

Recommended PCB Layout & Application

10001-3

PART NUMBER

Notes:

1) Material(材質):
Housing: LCP Color Black.
Contact: Brass
Spring : Stainless steel wire

2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 鍍金0.1um Min 鍍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 鍍金0.4um Min 鍍底1.4um Min)



3 Mechanical:
Spring force: Min 0.2N with 0.3mm stroke

1.1 +0.30N/-0.20N with 1.0mm stroke
Total stroke(总行程): 1.40mm
Durability(寿命): 10,000 cycle min.

LDC	-
DIST	-

	變更材質		2010/05/12
	改BODY 結構		2010/01/25
LTR	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	
0	= ±-	DWN	APVD		Top-Link <i>Electronics</i>		
0.0	= ±0.15	qin			Top-Link Electronics Ltd.		
0.00	= ±0.10	CHK	REL				
0.000	= ±						
ANGLE: ±1°							
SURF TEXTURE: 3.2/ 		NAME BATTERY POGO CONNECTOR 3 POSITIONS RIGHT ANGLE					
REMOVE BURRS, BREAK SHARP EDGES P0.05 MAX	SCALE		A4	DWG NO.	C-1000001	SHEET 1 OF 1	REV F
DO NOT SCALE PRINT	1:1						