


DIST

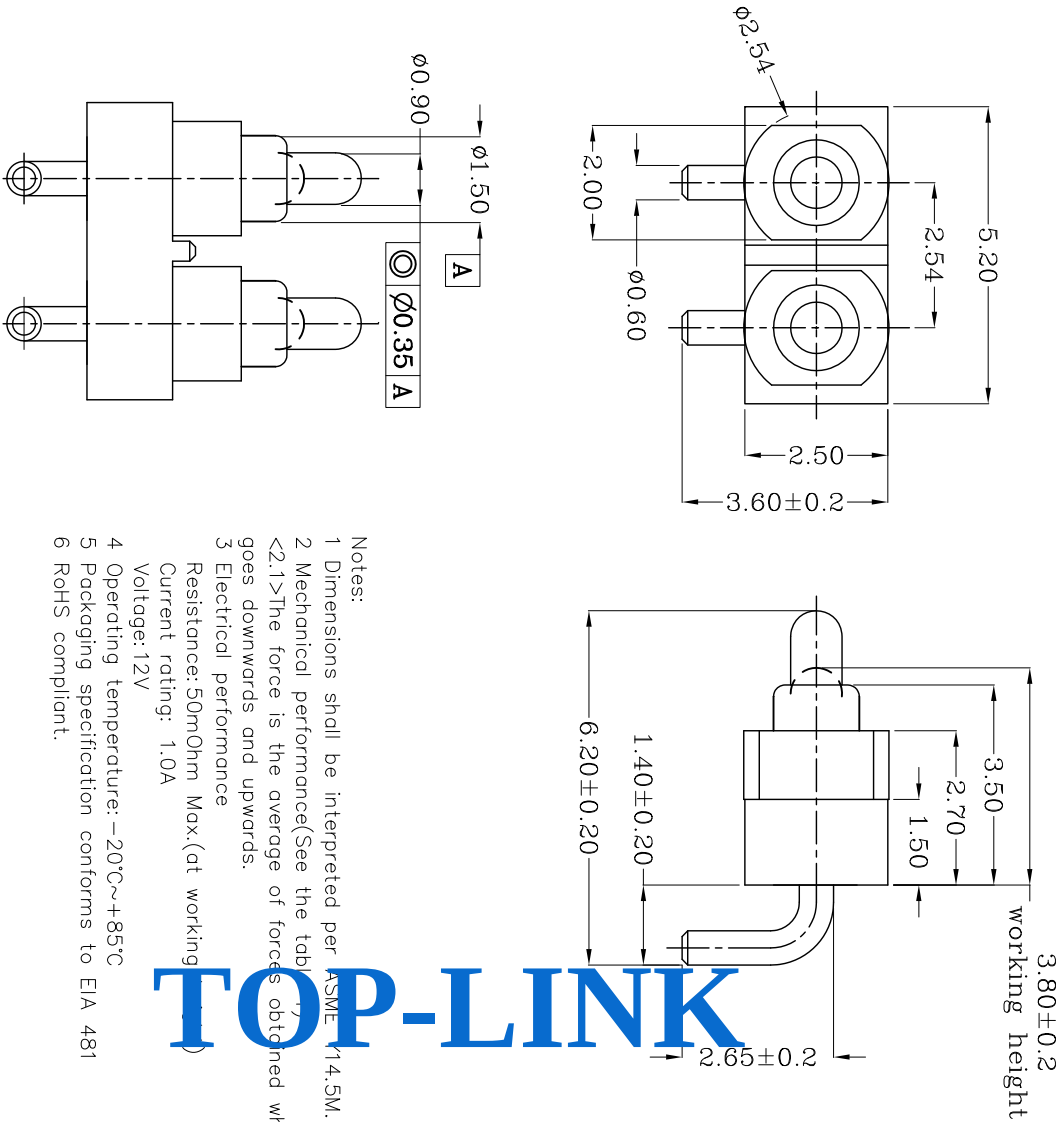

TOP-LINK

6.1 Recommended PCB Layout

Table 1 Mechanical performance		
working height	3.80mm	150±30gf <2.1>
Durability	10000cycle	

Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	2	Leaded Brass	Min 0.25µm Gold plating over Min 1.4µm Nickel plating
3	Plunger	2	Leaded Brass	Min 0.25µm Gold plating over Min 1.4µm Nickel plating
4	Spring	2	Stainless steel wire	_____
5				

7	THE HOUSING CHANGE	2014/05/20	Top-Link Electronics Ltd.	Type Customer drawing	Unit mm	Weight	1001008-2
6.1	Update PCB Layout	2014/05/20	TOLERANCES UNLESS OTHER SPECIFIED	DWN: Guizhiguo	APVD:		PART NUMBER
6	Update	2013/11/07	0.0 = ±0.15 0.00 = ±0.10 0.000 = ±0.05	CHK:	REL:		
5	Update PCB Layout	2013/10/28	Angle: ±1° SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX,DO NOT SCALE PRINT.	Name Pogo pin connector	DWG No.	C-1001008	
Rev.	Revision record.	Date.		Scale 1:1	Size A4	Page 1/1	Rev. 7