
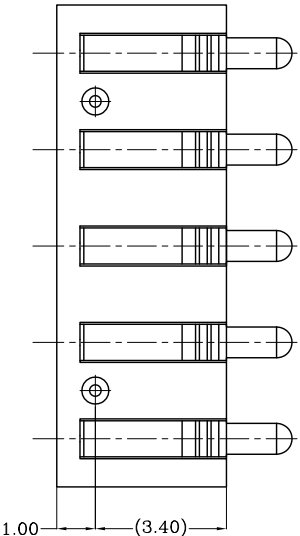
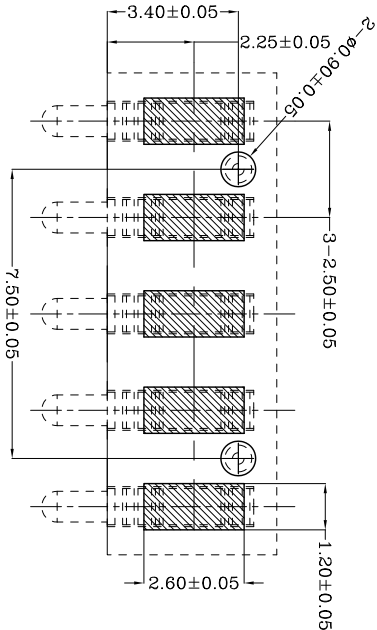
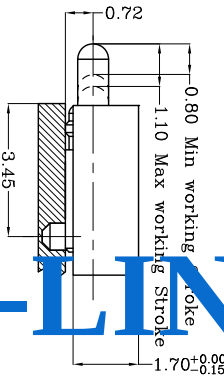
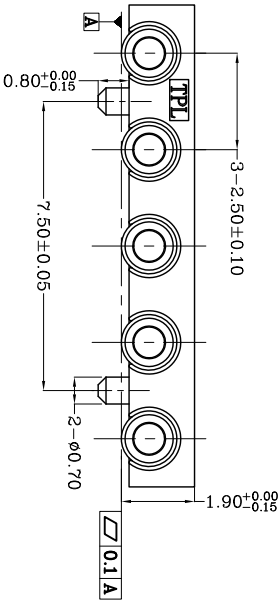


DWN No.:
C-100814

Proposal

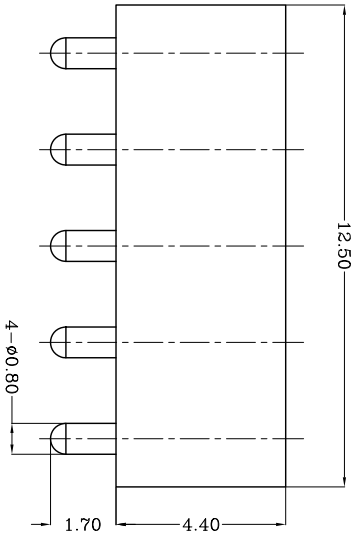

- Notes:
- 1 Dimensions shall be interpreted per ASME Y14.5M-1994.
 - 2 Mechanical performance(See the table 2)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 - <2.2>Warning: Working height are not permitted to be less than Min working height.
 - 3 Electrical performance
Resistance: 30mOhm Max.; Current: 2A DC
 - 4 Packaging Spec.
 - 5 RoHS compliant.

TOP-LINK

Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High Temp Plastic UL94 V-0 Color Black	_____
2	Body	5	Leaded Brass	Gold plating over Nickel plating
3	Plunger	5	Leaded Brass	Gold plating over Nickel plating
4	Spring	5	Stainless steel wire	_____
5				

Table 2 Mechanical performance			
The Min.working Stroke	0.80mm	80gf min<2.1>	
The Max.working Stroke	1.10mm	160gf max	
Durability		10000 cycle	

100814-5
PART NUMBER

Top-Link Electronics Ltd.		Type	Unit	Weight
TOLERANCES UNLESS OTHER SPECIFIED		Customer drawing	mm	
0.0 = ±0.15	DWN:	APVD:		
0.00 = ±0.10	CHK:	REL:		
0.000 = ±0.05	Angle: ±11°			
SURF. TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.		Name	Customer drawing	
		Scale	Size	DWG No.
		1:1	A4	C-100814
		Page	1/1	Rev. 1

DIST

Rev.	NEW	2012/05/09
Revision record.	Date.	

4

3

2

1