
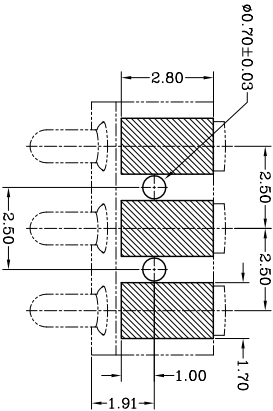


TOP-LINK

Notes:

- 1) Material: Housing: High temp. Plastic, UL94 V-0 Color Black.
Contact: Brass
Spring : Stainless steel wire
- 2) Plating:
1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
- 3) Mechanical:
Spring force: Min 30g with 0.4mm stroke
130±30g with 1.0mm stroke.
- Total stroke: 2.00mm
Durability: 10,000 cycle min.
- 4) Electrical:
Contact resistance: 30mOhm Max.
Voltage rating: 36V DC Max
Current rating: 2.0A



Recommended P.C.B layout (Component Side)

LDC
-
DIST
-

Update remark	REVISION RECORD	APVD	DATE

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED			
0	= ±		
0.0	= ±0.15		
0.00	= ±0.10		
0.000	= ±		
ANGLE: ±1°			
SURF TEXTURE: 32/			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT			
MATL	HT TR	FIN	
DWN	APVD		
CHK	REL		
NAME	BATTERY CONNECTOR 3 PDS.		
SCALE	PGC-1.5-2.2-RA-3P-2.5PH		
1:1	A4	DWG NO.	C-100021
		SHEET	1 OF 1
		REV	C

100021-3

PART NUMBER

USED ON

-