



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.



DWN No.: C-101279

DIST

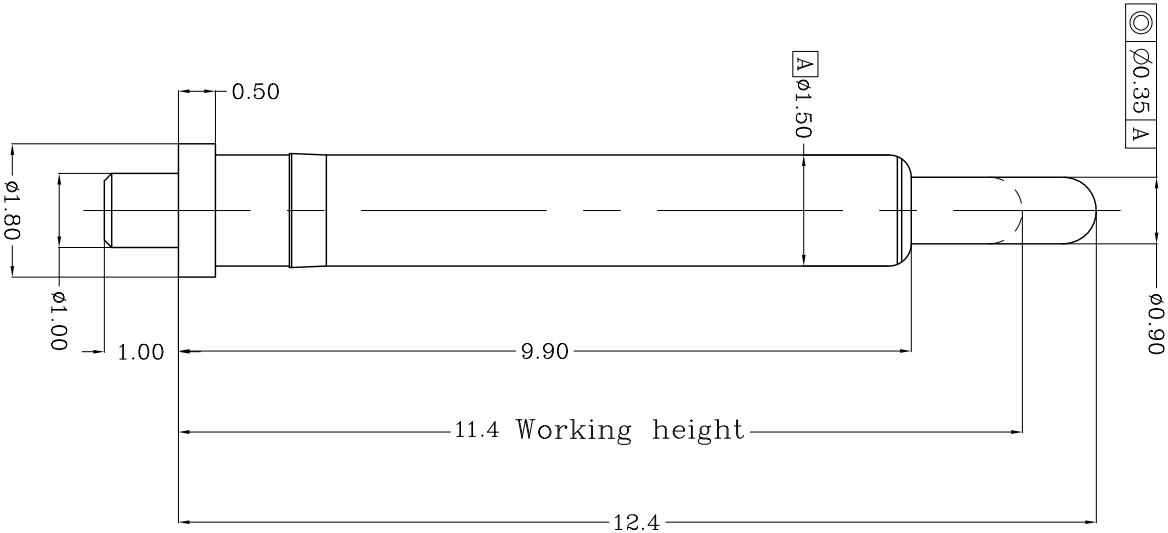

Rev.	NEW	2012/01/14
Revision record.		
Date.		

Top-Link Electronics Ltd.	Type	Unit	Weight	PART NUMBER
TOLERANCES UNLESS OTHER SPECIFIED	Customer drawing	mm		101279-1
0.0 = ±0.15	DWN: Qin zuozhong	APVD:		
0.00 = ±0.10	CHK:	REL:		
0.000 = ±0.05	Angle: ±1°			
SURF. TEXTURE: REMOVE BURRS.	Name	POGO PIN		
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.	Scale	Size	DWG No.	Page
	1:1	A4	C-101279	1/1

Rev. A

Not
1 Demnnsions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.
3 Electrical performance
Resistance: 50mOhm Max.Current rating: 2.0A
4 RoHS compliant.

Table 1 Mechanical performance		
Working height	11.40mm	90±25gf <2.1>
Durability	10000cycle	

Item	Part name	Qty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	
4				
5				