




DIST

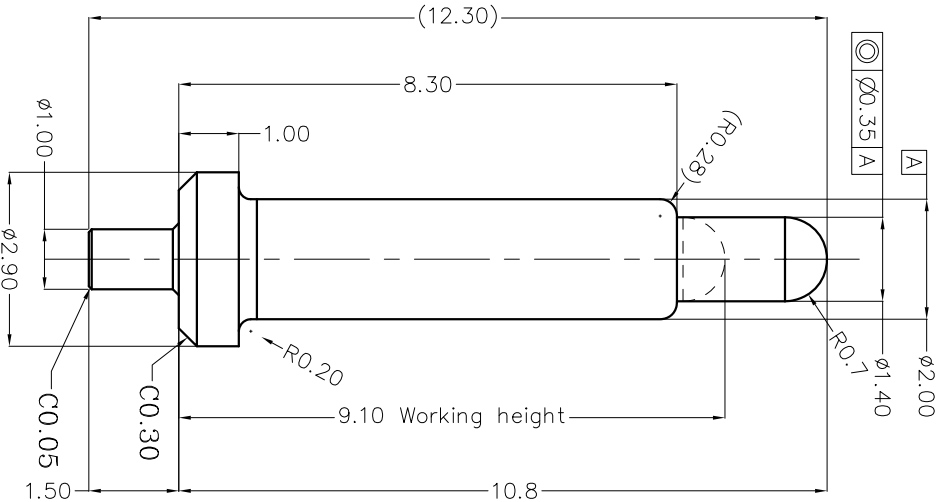

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au plating over Ni
2	Plunger	1	Leaded Brass	Au plating over Ni
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
Working height	9.10mm	160±25gf <2.1>
Durability	10000cycle	

Not

1 Demnisions shall be interpreted per ASME Y14.5M.

2 Mechanical performance(See the table 1)

<2.1> The force is the average of forces obtained when plunger goes downwards and upwards.

<2.2> Total stroke : 2.3mm.

3 Electrical performance

Resistance: 30mOhm Max.Current rating: 3.0A

4 Remark compliant.

Top-Link Electronics Ltd.		Type	Customer drawing	Unit	mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN:	Qin zuozhong	APVD:	Top-Link Electronics Top-Link Electronics Ltd.	
0.0 = ± 0.15		CHK:		REL:		
0.00 = ± 0.10		POGO PIN				
0.000 = ± 0.05						
Angle: ±1°						
SURF. TEXTURE: REMOVE BURRS.						
BREAK SHARP EDGES R0.05 MAX. DO NOT SCALE PRINT.						
		Scale	Size	DWG No.	Page	Rev.
		1:1	A4	C-101338	1/1	C

Top-Link Electronics Ltd.