
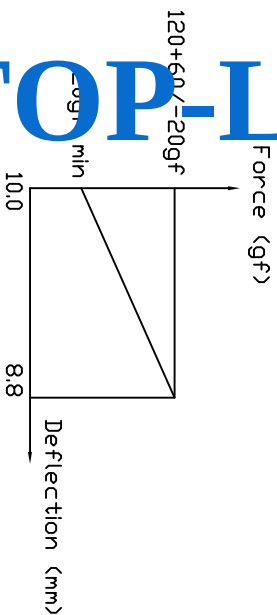


DWG NO.
C-101044

	NEW		2007/04/05
LTR	REVISION RECORD	APVD	DATE

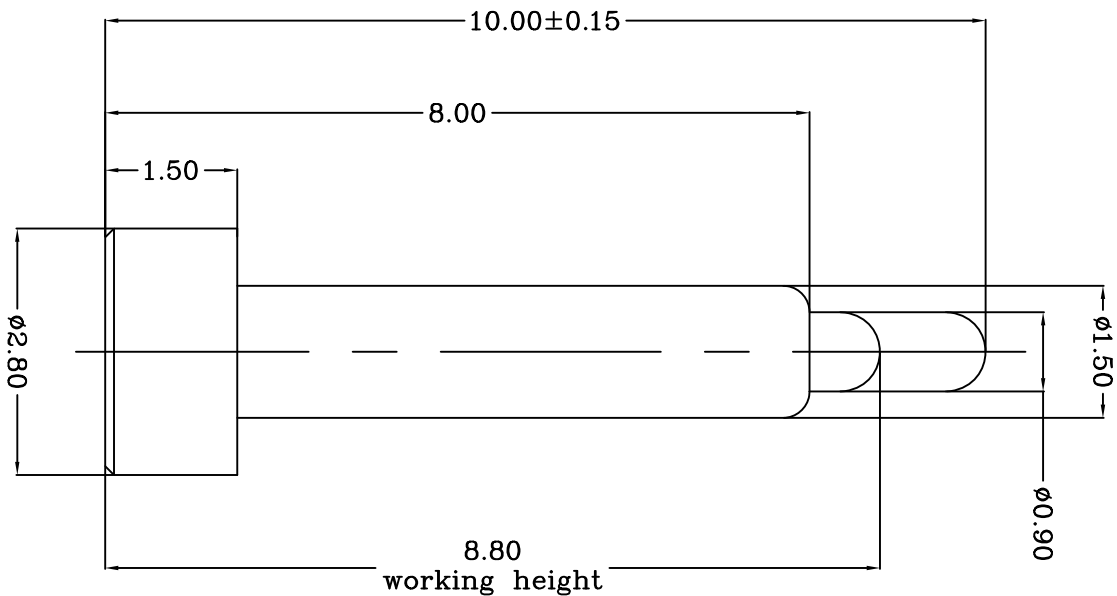

TOP-LINK

Notes: Material

Material:

- 1) Plunger & Body : CuZn36 Pb3, HO2 (C36000) or CuZn39 PB3 or CuZn38 PB2.
- 2) Spring : Stainless steel wire
- 2 Plating
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickle plating
 - 2) Plunger: Min 0.4um Gold plating over min. 2.5um Nickle plating
- 3 Mechanical
 - 1) Total stroke : 1.80mm
 - 2) Durability: 10,000 cycle min.
- 4 Electrical
 - 1) Contact resistance: 30mOhm Max.
 - 2) Operating voltage: 36VDC

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL		HT TR	—	FIN	— 
0	= ±	DWN		APVD		 Top-Link Electronics Top-Link Electronics Ltd.	
0.0	= ±0.10	Benny		Lensing			
0.00	= ±0.10	CHK		REL			
0.000	= ±	Andy					
ANGLE: ±1°							
SURF. TEXTURE: 32/		NAME		PGGD PIN			
REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX		SCALE	A4	DWG NO.	C-101044	SHEET 1 OF 1	REV A
DO NOT SCALE PRINT		1:1					

101044-1
PART NUMBER

USED ON

1