


DWG NO.
C-101400

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN TOP-LINK PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM TOP-LINK LTD.

LDC
-
DIST
-

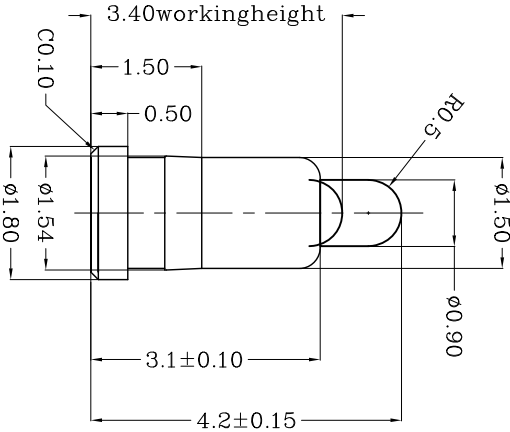

TOP LINK

Notes:
△ Material(材质):

- 1) Body : Brass
- 2) Plunge : Brass
- 3) Spring : Stainless steel wire
- 2 Plating(电镀):
 - 1) Body: Min 0.1um Gold plating over min. 1.4um Nickel plating (Body: 镀金0.1um Min 镍底1.4um Min)
 - 2) Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating (Plunger: 镀金0.4um Min 镍底1.4um Min)
 - 3) Mechanical(机械性能):
 - 1) Force: 110±25gf per pin at 0.8mm stroke (力: 下压0.8mm的力: 110±25gf)
 - 2) Total stroke(总行程) : 1.10mm
 - 3) Durability(寿命): 10,000 cycle min.
 - 4) Electrical(电性能)
 - 1) Contact resistance(接触抵抗): 30mOhm Max.
 - 2) Voltage rating(额定电压): 36V DC Max
 - 3) Current rating(额定电流): 2.0A

DIMENSIONS IN MM				TOLERANCES UNLESS OTHER SPECIFIED			
0	= ± -			0.0	= ±0.10		
0.0	= ±0.05			0.00	= ±		
0.000	= ±			ANGLE: ±1°			
SURF TEXTURE: 32/				REMOVE BURRS, BREAK SHARP EDGES R0.05 MAX DD NOT SCALE PRINT			
NAME				POGDO PIN			
SCALE 1:1				PG-1.8-0.5-1.5-3.1-4.2			
A4				DWG NO. C-101400			
REL				SHEET 1 OF 1			
APVD				REV 1			
DWN							
CHK							
MTRL							
HT TR							
FIN							

A

B

C

D

USED ON -

101400-1

PART NUMBER

Top-Link Electronics Ltd.